






DRILL BIT KIT p10

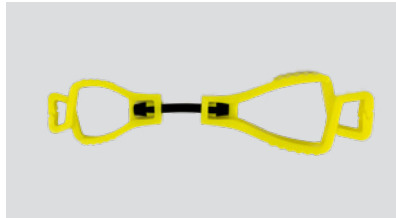

GLOVE CLIPS p32

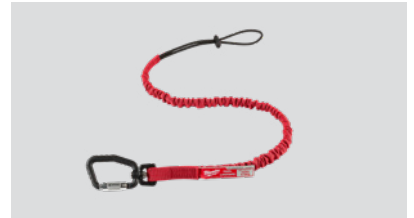

TOOL LANYARDS p34

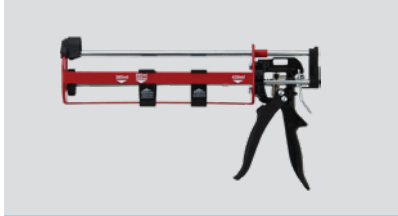


CHEMICAL INJECTION GUN p52



CHEMICAL ANCHORING p52



CAST-IN STUDS p53

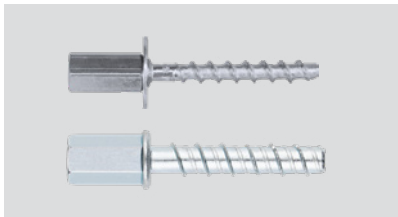

SEISMIC ROD HANGERS p57



SEISMIC THROUGH BOLTS p61




TIE WIRE THROUGH BOLTS p64



DUCT QUICK SCREWS p74



FIRE COLLARS p78

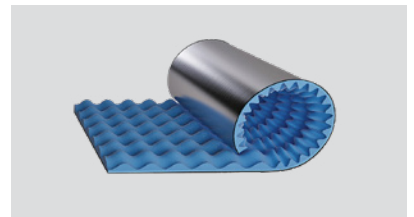

ACOUSTIC LAGGING p82




STRUT LOCK p83



PVC SLEEVE p92



SEISMIC ROD STIFFENER p92

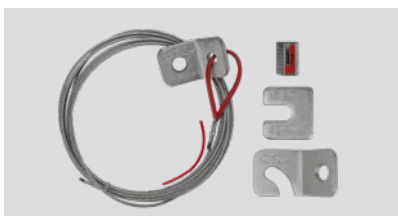

SEISMIC BRACING KITS p93



ON SITE STORAGE p94



PIPE INSULATIONS p95



ADJUSTABLE NOGGINS p97




FOAM BLOCKS p101



PIZZA TRAYS p101

# FLEXISTRUT

## SUPPORTING AUSTRALIA

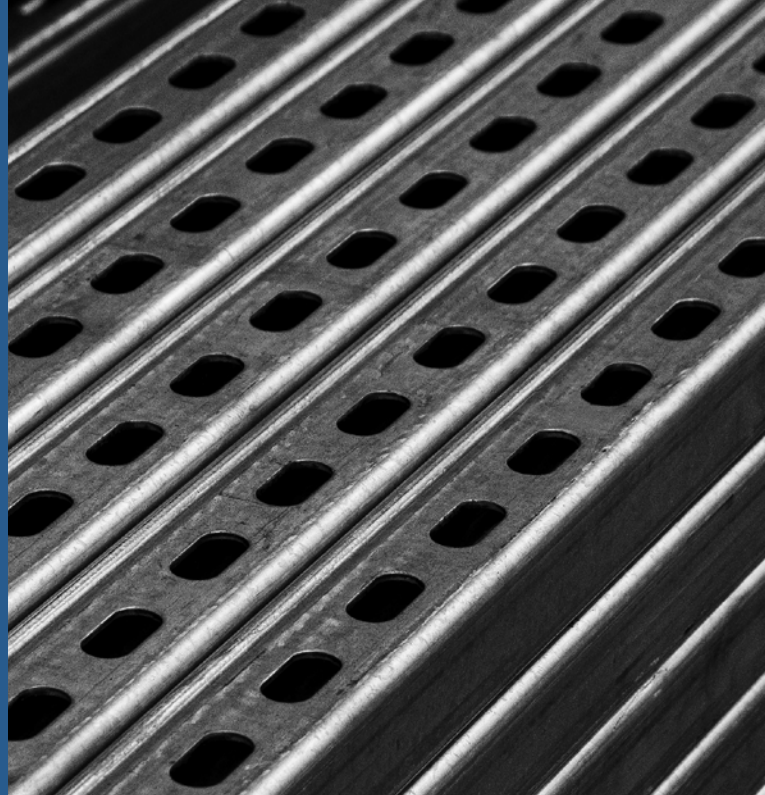


## QUALITY YOU CAN TRUST

Flexistrut Australia is committed to providing high-quality products to our customers. We understand that sourcing high-quality consumables is crucial to ensuring the timely completion and success of any project, and we take great care in selecting the best goods for our customers. At the same time, we are always looking for new and innovative products to add to our range, ensuring that our customers have access to the latest and most effective solutions. Whatever you need for your next project, you can rely on Flexistrut Australia to provide the best possible products and service.



## ABOUT US

Trading for over 40 years with branches across Australia, Flexistrut has developed a reputation as a trusted partner for construction companies nation wide. We are proud to have built long-lasting relationships with our clients based on trust, reliability, and outstanding service.

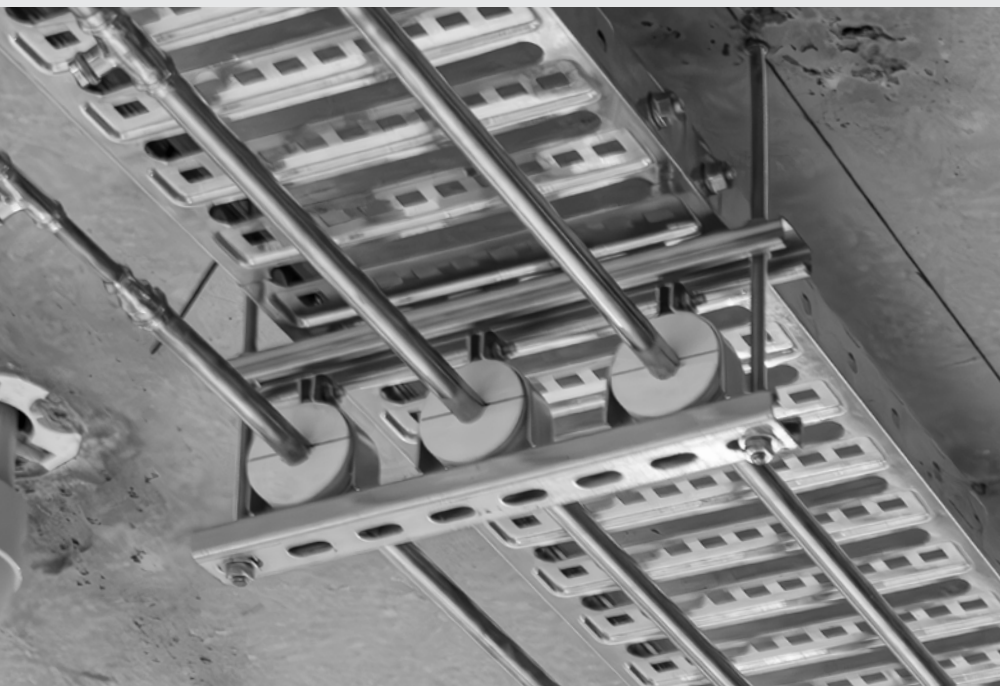

## PIPE SUPPORTS

For channels and pipe supports see our latest Engineering Catalogue



## DRILLING & ACCESSORIES

HIGH SPEED DRILL BITS	6 - 10
STEP DRILLS	10
GLASS & TILE DRILL BITS	11
INSERT BITS	12 - 13
SPADE BITS	13
AUGER BITS	14
SELF FEED BITS	14
POINT & CHISEL BITS	15
MASONRY DRILL BITS	16 - 18
HOLE SAWS + ACCESSORIES	19 - 21

## ABRASIVES

CUT OFF WHEELS	22
GRINDING WHEELS	22
TURBO RIM WHEELS	23
COLD CUT WHEELS	23
FLAP DISCS	24
ABRASIVE MOPS	24
ABRASIVES	25
HAND PADS	25
RECIPROCATING SAW BLADES	26
HACKSAW + BLADES	27
JIGSAW BLADES	27
MULTI TOOL BLADE	27

## SEALANTS

SILICONE - ROOF & GUTTER	28
SILICONE - KITCHEN & BATHROOM	28
DUCT SEALANTS	28
FIRE RATED SEALANTS	29
POLYURETHANE SEALANTS	29
GAP FILLER	29
PROMASEAL® SEALANTS	30
SEALANT TOOLS	30
EXPANSION FOAMS	31
NON SHRINK GROUT	31

## SAFETY

HAND PROTECTION	32
GLOVE CLIP	32
HEARING PROTECTION	33
RESPIRATORY PROTECTION	33
EYE PROTECTION	33
HARD HATS	34
VISUAL PROTECTION	34
TOOL LANYARD	34
FIRE EXTINGUISHER	35
PADLOCKS	35

## MARKING

SPRAY + MARK PAINT	36
SPRAY CANS - ENAMEL + PROTECTION	36
PENCILS / CRAYONS	36
MARKERS	37
CHALK LINES	37

## FIXINGS

RIVETS + ACCESSORIES	38 - 39
METAL SCREWS	40 - 43
WOOD SCREWS	44 - 47
PLASTER BITE ANCHORS + SCREWS	48
SPRING TOGGLE ANCHOR	48
HOLLOW WALL ANCHOR + SETTING TOOL	49
DOG-BITES®	49
NYLON ANCHORS	50
METAL WEDGE ANCHORS	51
METAL PIN ANCHORS	51
WALL PLUG	51
CHEMICAL ANCHORS + ACCESSORIES	52 - 53
DROP IN ANCHORS + ACCESSORIES	54 - 55
HOLLOW SET DROP IN ANCHORS	55
ROD HANGERS + ACCESSORIES	56 - 57
CAST IN ROD HANGERS	58
CONCRETE SCREWS	58 - 59
THROUGH BOLTS	60 - 61
HEX SLEEVE ANCHORS	62 - 63
GRABCON®	64
TIE WIRE CEILING HANGER	64
TIE WIRE THROUGH BOLT	64
EYE BOLT SLEEVE ANCHOR	64

## FORCED ENTRY

POWDER ACTUATED TOOL	65
POWDER ACTUATED CHARGES	65
POWDER ACTUATED WASHERED PINS	66
POWDER ACTUATED PINS	66
POWDER ACTUATED ANGLE CLIPS	67
POWDER ACTUATED THREADED ROD HANGERS	67
POWDER ACTUATED CABLE TIES	67
GAS POWERED TOOL & ACCESSORIES	68
GAS POWERED HARD CONCRETE PINS	68
GAS POWERED CABLE TIE MOUNTS	69
GAS POWERED ROD HANGERS	69
GAS POWERED ANGLE CLIPS	69
GAS POWERED SELF LOCKING CLIP	70
GAS POWERED WASHERS	70
GAS POWERED CONDUIT CLIPS	70
DEWALT ELECTRIC CONCRETE NAILER + ACCESSORIES	71
DEWALT HARD CONCRETE PINS	71

## DUCT ACCESSORIES

HANGING STRAPS	72
DUCT SADDLE	72
DUCT FOAMS	73
DUCT CLEATS	73
DUCT QUICK SCREW	74
DUCT WRAPS	74
REGISTER SPRINGS	75
FIRE DAMPER WRAPS	75

TAPES	
FOIL TAPES	76
DUCT TAPES	76
ELECTRICAL TAPES	77
BARRIER/HAZARD TAPES	77

## FIRE PROTECTION

CAST-IN COLLARS	78
LOW CAST-IN COLLARS	78
FLOOR WASTE COLLARS	78
RETROFIT COLLARS	79
RETROFIT FLOOR WASTE COLLARS	79
ALLPROOF FIRE COLLARS	80
UNICOLLAR®	80
CONDUIT COLLARS	80
WALL COLLARS	81
SUPAWRAP	81
ACOUSTIC LAGGING	82
PENETRATION SEAL STICKER	82
FIRE PILLOWS	82

## ZIP-CLIP

WIRE	83
LOCKING DEVICE	83
STRUT-LOCK	83
CON-LOCK	84
SHOT-LOCK	84
UNI-LOCK	85
KNOCK-IT	85
LOCK	86
DEC-LOCK	86
SNAP-IT	87
GRIP-IT	87
THREAD-IT	88
TOGGLE-IT	88
Y-IT SNAP	89
Y-IT TOGGLE	89
LUMA-LOCK	90
TRY-LOCK	90
WIRE CUTTER	90
TENSIONER GUN	91
DUCT HANGER	91
CON-LOCK SPIKE	91
SEISMIC ROD STIFFENER	92
PVC SLEEVE	92
CORNER PROTECTOR	92
SEISMIC BRACING KITS	93
RETROFIT ANGLE BRACKET	93

GENERAL	
SITE BOX	94
SITE CABINET	94
PIPE INSULATIONS	95
CONSTRUCTION FOAMS	95
GIRDER CLIPS	96
VERTICAL FLANGE CLIP	96
ADJUSTABLE NOGGINS	97
HOSE CLAMPS	97
DEKTITES® METAL ROOF	98
CLOUTS	98
CABLE TIES	99
CABLE TIE TENSIONING TOOL	99
STUD PUNCH AND GROMMETS	100
DAMP COURSE	100
WAFFLE PADS	100
BUILDERS STRAP	101
FOAM BLOCK	101
PIZZA TRAY	101
BROOMS	102
MEASURING TAPE	102
UTILITY KNIFE	102
CUTTING COMPOUNDS	103
SOLDER PASTE	103
ROLL GROVE LUBRICANT	103
DEGREASING SPRAYS	104
LIQUIDS	104
PAINT BRUSHES	104
PVC CEMENT/PRIMERS	105
RAGS	105
THREAD SEALING/JOINTING	106
STRING LINES	106
BATTERIES	107
ELECTRICAL ACCESSORIES	107
EXTENSION LEADS	107
LIGHT DUTY SADDLES	108
PIPE MARKERS	109

## BOLTS, NUTS & WASHERS

BOLT & NUTS	110 - 113
HEX HEAD SET SCREWS	114 - 116
CUP HEAD BOLT & NUTS	117 - 118
HEX NUTS	119
WIZZ NUTS	119
NYLON BOLTS & NUTS	119
NYLOC HEX NUTS	120
SPRING WASHERS	120
FLAT WASHERS	121
MUDGUARD WASHERS	121

## METRIC HIGH SPEED STEEL DRILL BITS



## Description

Fully ground M2 high speed steel drill bits in metric sizing

Titanium Nitride coating reduces heat whilst drilling

135° Split point for faster cutting



Steel

Wood

PART NO.	DRILL DIAMETER	OVERALL LENGTH	DRILL DEPTH	CARTON
	mm	mm	mm	QTY
HSS-1.0	1.0	34	12	10
HSS-1.5	1.5	40	18	10
HSS-2.0	2.0	49	24	10
HSS-2.5	2.5	57	30	10
HSS-3.0	3.0	61	36	10
HSS-3.5	3.5	70	39	10
HSS-4.0	4.0	75	43	10
HSS-4.5	4.5	80	47	10
HSS-5.0	5.0	86	52	10
HSS-5.5	5.5	93	57	10
HSS-6.0	6.0	93	57	10
HSS-6.5	6.5	101	63	10
HSS-7.0	7.0	109	69	5
HSS-7.5	7.5	109	69	5
HSS-8.0	8.0	117	75	5
HSS-8.5	8.5	117	75	5
HSS-9.0	9.0	125	81	5
HSS-9.5	9.5	125	81	5
HSS-10.0	10.0	133	87	1
HSS-10.5	10.5	133	87	1
HSS-11.0	11.0	142	94	1
HSS-11.5	11.5	142	94	1
HSS-12.0	12.0	151	101	1
HSS-12.5	12.5	151	101	1
HSS-13.0	13.0	151	101	1



**METRIC REDUCED SHANK HIGH SPEED STEEL DRILL BITS**



**Description**

Reduced shank to fit standard 10mm & 13mm drill chucks

Fully ground, single piece, M2 high speed steel drill bits in metric sizing

135° Split point for faster cutting



Steel

Wood

PART NO.	SHANK	DRILL DIAMETER	OVERALL LENGTH	DRILL DEPTH	CARTON
	mm	mm	mm	mm	QTY
HSS-3/8RSM10.5	10.0	10.5	133	87	1
HSS-3/8RSM11	10.0	11.0	142	94	1
HSS-3/8RSM11.5	10.0	11.5	142	94	1
HSS-3/8RSM12	10.0	12.0	151	101	1
HSS-3/8RSM12.5	10.0	12.5	151	101	1
HSS-3/8RSM13	10.0	13.0	151	101	1
HSS-3/8RSM13.5	10.0	13.5	152	86	1
HSS-3/8RSM14	10.0	14.0	152	86	1
HSS-RSM14	12.5	14.0	152	86	1
HSS-RSM14.5	12.5	14.5	152	86	1
HSS-RSM15	12.5	15.0	152	86	1
HSS-RSM16	12.5	16.0	152	86	1
HSS-RSM16.5	12.5	16.5	152	86	1
HSS-RSM18	12.5	18.0	152	86	1
HSS-RSM19	12.5	19.0	152	86	1
HSS-RSM20	12.5	20.0	152	86	1
HSS-RSM22	12.5	22.0	152	86	1
HSS-RSM25	12.5	25.0	152	86	1

**IMPERIAL HIGH SPEED STEEL DRILL BITS**



**Description**

Fully ground M2 high speed steel drill bits in imperial sizing

Titanium Nitride coating reduces heat whilst drilling

135° Split point for faster cutting



Steel

Wood

PART NO.	DRILL DIAMETER	OVERALL LENGTH	DRILL DEPTH	CARTON
	mm	mm	mm	QTY
HSS-1/4	6.35	101	70	10
HSS-5/16	7.94	114	81	5

## METRIC STUB HIGH SPEED STEEL DRILL BITS



### Description

Fully ground M2 high speed steel drill bits in metric sizing

Titanium Nitride coating reduces heat whilst drilling

135° Split point for faster cutting



Steel

Wood

PART NO.	DRILL DIAMETER	OVERALL LENGTH	DRILL DEPTH	CARTON
	mm	mm	mm	QTY
HSS-6.0STUB	6.0	66	28	10
HSS-8.0STUB	8.0	79	37	5
HSS-10.0STUB	10.0	89	43	5
HSS-12.0STUB	12.0	102	51	5

## IMPERIAL STUB HIGH SPEED STEEL DRILL BITS



### Description

Fully ground M2 high speed steel drill bits in imperial sizing

Titanium Nitride coating reduces heat whilst drilling

135° Split point for faster cutting



Steel

Wood

PART NO.	DRILL DIAMETER	OVERALL LENGTH	DRILL DEPTH	CARTON
	mm	mm	mm	QTY
HSS-3/16STUB	4.76	54	27	10
HSS-1/4STUB	6.35	64	34	10
HSS-5/16STUB	7.94	71	41	5
HSS-3/8STUB	9.53	79	46	5
HSS-13/32STUB	10.32	84	49	5
HSS-1/2STUB	12.70	95	57	5



## PANEL HIGH SPEED STEEL DRILL BITS



### Description

Fully ground M2 high speed steel drill bits to suit rivets

Titanium Nitride coating reduces heat whilst drilling

135° Split point for faster cutting



Steel

Wood

PART NO.	END	SUIT RIVET	DRILL DIAMETER	OVERALL LENGTH	DRILL DEPTH	CARTON QTY
		INCH	mm	mm	mm	
HSS-SE11	SINGLE	3/16	4.85	60	16	10
HSS-SE20	SINGLE	5/32	4.09	51	17	10
HSS-SE30	SINGLE	1/8	3.26	51	13	10
HSS-DE11	DOUBLE	3/16	4.85	60	16	10
HSS-DE20	DOUBLE	5/32	4.09	60	16	10
HSS-DE30	DOUBLE	1/8	3.26	51	13	10

## GAUGE STUB HIGH SPEED DRILL BITS



### Description

Fully ground M2 high speed steel drill bits in gauge sizing

Titanium Nitride coating reduces heat whilst drilling

135° Split point for faster cutting



Steel

Wood

PART NO.	END	SUIT RIVET	DRILL DIAMETER	OVERALL LENGTH	DRILL DEPTH	CARTON QTY
		INCH	mm	mm	mm	
HSS-SE11STUB	SINGLE	3/16	4.85	58	30	10
HSS-SE20STUB	SINGLE	5/32	4.09	54	27	10
HSS-SE30STUB	SINGLE	1/8	3.26	51	25	10



## METRIC HIGH SPEED STEEL DRILL BIT SETS



### Description

Fully ground M2 high speed steel drill bits in metric sizing

Titanium Nitride coating reduces heat whilst drilling

135° Split point for faster cutting

1.0mm - 13.0mm in 0.5 increments

\*Refer to individual sizing for exact lengths



PART NO	DRILL DIAMETER	OVERALL LENGTH	DRILL DEPTH	CARTON
	mm	mm	mm	QTY
HSS-SET	1.0 - 13.0	34 - 151	12 - 101	1

## STEP DRILLS HIGH SPEED DRILL BITS



### Description

Step drills allow a range of diameters on a single drill bit

Step drill bits in metric sizing increments

Titanium Nitride coating reduces heat whilst drilling


Three flats on shank to prevent slippage in the chuck



PART NO.	SHANK	DRILL DIAMETER	OVERALL LENGTH	CARTON
	mm	mm	mm	QTY
HSS-STEP420	8.0	4 - 20	70	1
HSS-STEP630	10.0	6 - 30	100	1



**GLASS & TILE DRILL BITS**

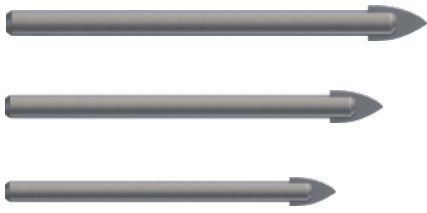

**Description**

Spear point end drill bits are suitable for drilling mirrors, glass (excluding toughened glass) and ceramic tiles

Tungsten carbide tip extends product life

For best results use plenty of water whilst drilling



Glass



Ceramic

PART NO	DRILL DIAMETER	DRILL DIAMETER	OVERALL LENGTH	CARTON
	mm	INCH	mm	QTY
GNT-6.0	6.0	-	76	1
GNT-8.0	8.0	-	82	1
GNT-10.0	10.0	-	89	1
GNT-12.0	12.0	-	96	1
GNT-1/4	-	1/4	76	1
GNT-5/16	-	5/16	82	1
GNT-3/8	-	3/8	89	1
GNT-1/2	-	1/2	96	1

## PHILLIPS HEAD DRIVER BITS



### Description

Phillips head driver bits are designed to be utilized with screws and masonry fasteners requiring phillips configuration

Magnetized for ease of installation

Features 1/4" hex shank

For use in impact drivers

PART NO.	DRIVE	END	LENGTH	SUIT	CARTON
			mm		QTY
PH1-25	HEX 1/4"	SINGLE	25	PHILLIPS NO 1	10
PH1-50	HEX 1/4"	SINGLE	50	PHILLIPS NO 1	10
PH2-25	HEX 1/4"	SINGLE	25	PHILLIPS NO 2	10
PH2-50	HEX 1/4"	SINGLE	50	PHILLIPS NO 2	10
PH2-75	HEX 1/4"	SINGLE	75	PHILLIPS NO 2	10
PH2-100	HEX 1/4"	SINGLE	100	PHILLIPS NO 2	10
PH2-150	HEX 1/4"	SINGLE	150	PHILLIPS NO 2	10
PH2-45DE	HEX 1/4"	DOUBLE	45	PHILLIPS NO 2	10
PH2-65DE	HEX 1/4"	DOUBLE	65	PHILLIPS NO 2	10
PH2-100DE	HEX 1/4"	DOUBLE	100	PHILLIPS NO 2	10

## NUT SETTER BITS



### Description

Nut setters are designed to be utilised with screws and masonry fasteners requiring hex head configurations

Magnetized for ease of installation


Features 1/4" hex shank

For use in impact drivers

PART NO.	DRIVE	LENGTH	SUIT	CARTON
		mm		QTY
NS1/4X42	HEX 1/4"	42	HEX 1/4"	10
NS1/4X65	HEX 1/4"	65	HEX 1/4"	10
NS5/16X42	HEX 1/4"	42	HEX 5/16"	10
NS5/16X65	HEX 1/4"	65	HEX 5/16"	10
NS5/16X150	HEX 1/4"	150	HEX 5/16"	10
NS3/8X42	HEX 1/4"	42	HEX 3/8"	10
NS3/8X65	HEX 1/4"	65	HEX 3/8"	10
NS3/8X150	HEX 1/4"	150	HEX 3/8"	10
NS13x55	HEX 1/4"	55	13mm	10



**SOCKET ADAPTOR BITS**



**Description**

Socket adaptor bits are designed to be utilised with traditional socket sets

Locking head to prevent sock disengaging

For use in impact drivers

PART NO.	DRIVE	LENGTH	SUIT	CARTON
		mm		QTY
SQR1/4	HEX 1/4"	75	SOCKET 1/4"	10
SQR3/8	HEX 1/4"	75	SOCKET 3/8"	10
SQR1/2	HEX 1/4"	75	SOCKET 1/2"	10

**SPADE BITS**



**Description**

1/4" Hex attachments to suit drills and impact drivers

Double outside spurs provide a cleaner cut and reduces vibration

One piece carbon steel construction

Self locating starting point



Wood

PART NO	CHISEL DIAMETER	LENGTH	CARTON
	mm	mm	QTY
SPADE-6	6.0	150	1
SPADE-8	8.0	150	1
SPADE-10	10.0	150	1
SPADE-11	11.0	150	1
SPADE-12	12.0	150	1
SPADE-13	13.0	150	1
SPADE-14	14.0	150	1
SPADE-16	16.0	150	1
SPADE-18	18.0	150	1
SPADE-19	19.0	150	1
SPADE-20	20.0	150	1
SPADE-22	22.0	150	1
SPADE-24	24.0	150	1
SPADE-25	25.0	150	1
SPADE-28	28.0	150	1
SPADE-30	30.0	150	1
SPADE-32	32.0	150	1
SPADE-35	35.0	150	1
SPADE-38	38.0	150	1
SPADE-40	40.0	150	1

## AUGER DRILL BITS



### Description

Solid centre, heat treated carbon steel material increases durability and protects against bending during use

Coarse screw point to assist starting cleaning and efficiently in all timber materials

Flute designed for fast waste removal


3/8" hex attachments to suit drills and impact drivers



Wood

PART NO	DRILL DIAMETER	OVERALL LENGTH	CARTON
	mm	mm	QTY
AUGER-20.0X210	20.0	210	1
AUGER-20.0X330	20.0	330	1
AUGER-20.0X500	20.0	500	1
AUGER-25.0X210	25.0	210	1
AUGER-25.0X330	25.0	330	1
AUGER-25.0X500	25.0	500	1
AUGER-32.0X210	32.0	210	1
AUGER-32.0X330	32.0	330	1

## SELF FEED DRILL BITS

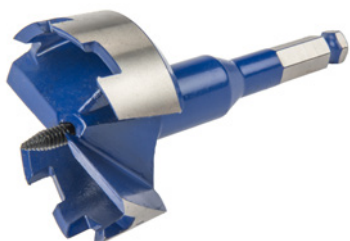

### Description

One piece, carbon steel material increases durability and protects against bending during use

Coarse screw point to assist starting cleaning and efficiently in all timber materials

7/16" hex attachments to suit 13mm Drill Drivers

Outside spurs cut holes fast with a clean finish



Wood

PART NO	DRILL DIAMETER	CARTON
	mm	QTY
SFW-25	25	1
SFW-29	29	1
SFW-32	32	1
SFW-35	35	1
SFW-38	38	1
SFW-44	44	1
SFW-51	51	1
SFW-54	54	1
SFW-57	57	1
SFW-65	65	1
SFW-76	76	1
SFW-92	92	1
SFW-118	118	1



**SDS+ POINT BITS**



Description

SDS+ multi fit suits most rotary hammer drills

Ideal for all masonry applications



Concrete

PART NO	CHISEL END	OVERALL LENGTH	CARTON
		mm	QTY
SDS-PC	POINT	250	1

**SDS+ CHISEL BITS**



Description

SDS+ multi fit suits most rotary hammer drills

Ideal for all masonry applications



Concrete

PART NO	CHISEL DIAMETER	OVERALL LENGTH	CARTON
	mm	mm	QTY
SDS-FC	20	250	1
SDS-FCSP	40	250	1

## SDS+ DRILL BITS (2 CUTTING TIPS)



## Description

SDS+ drill bits suitable to drill into most concrete & brick substrates

SDS+ multi fit head suits most rotary hammer drills

Tungsten carbide tipped heads to increase longevity

PGM Stamped



Concrete

PART NO	DRILL DIAMETER	OVERALL LENGTH	DRILL DEPTH	CARTON
	mm	mm	mm	QTY
SDS-4.0X160	4.0	160	100	1
SDS-5.0X110	5.0	110	50	10
SDS-5.0X160	5.0	160	100	10
SDS-5.0X210	5.0	210	150	1
SDS-5.5X110	5.5	110	50	1
SDS-5.5X160	5.5	160	100	10
SDS-6.0X110	6.0	110	50	10
SDS-6.0X160	6.0	160	100	10
SDS-6.0X210	6.0	210	150	1
SDS-6.5X110	6.5	110	50	10
SDS-6.5X160	6.5	160	100	10
SDS-7.0X160	7.0	160	100	1
SDS-8.0X110	8.0	110	50	1
SDS-8.0X160	8.0	160	100	10
SDS-8.0X210	8.0	210	150	1
SDS-8.0X450	8.0	450	400	1
SDS-8.0X600	8.0	600	550	1
SDS-8.0X1000	8.0	1000	950	1
SDS-10.0X110	10.0	110	50	1
SDS-10.0X160	10.0	160	100	10
SDS-10.0X210	10.0	210	150	10
SDS-10.0X260	10.0	260	200	1
SDS-10.0X450	10.0	450	400	1
SDS-10.0X600	10.0	600	550	1
SDS-10.0X1000	10.0	1000	950	1



## SDS+ DRILL BITS (2 CUTTING TIPS)



## Description

SDS+ drill bits suitable to drill into most concrete & brick substrates

SDS+ multi fit head suits most rotary hammer drills

Tungsten carbide tipped heads to increase longevity

PGM Stamped




Concrete

PART NO	DRILL DIAMETER	OVERALL LENGTH	DRILL DEPTH	CARTON
	mm	mm	mm	QTY
SDS-12.0X45	12.0	120	45	1
SDS-12.0X160	12.0	160	100	10
SDS-12.0X210	12.0	210	150	10
SDS-12.0X250	12.0	250	200	1
SDS-12.0X450	12.0	450	400	1
SDS-12.0X600	12.0	600	550	1
SDS-12.0X1000	12.0	1000	950	1
SDS-13.0X150	13.0	160	100	1
SDS-15.0X60	15.0	135	60	1
SDS-15.0X150	15.0	160	100	1
SDS-15.0X250	15.0	260	200	1
SDS-16.0X150	16.0	150	100	1
SDS-16.0X200	16.0	210	150	1
SDS-16.0X450	16.0	450	400	1
SDS-16.0X600	16.0	600	550	1
SDS-16.0X1000	16.0	1000	950	1
SDS-18.0X200	18.0	200	150	1
SDS-20.0X200	20.0	200	150	1
SDS-22.0X250	22.0	250	200	1
SDS-24.0X250	24.0	250	200	1
SDS-25.0X250	25.0	250	200	1



## SDS+ DRILL BITS (4 CUTTING TIPS)

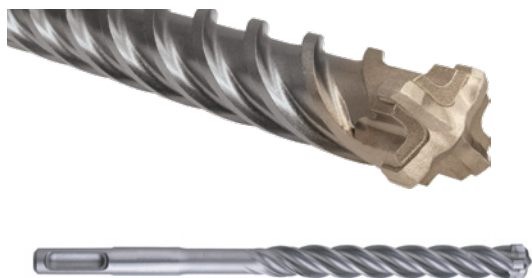

## Description

SDS+ drill bits suitable to drill holes into most concrete and thick substrates

Suitable for concrete with REO

SDS+ multi fit head suits most rotary hammer drills

Tungsten carbide tipped heads to increase longevity

PGM Stamped



Concrete

PART NO.	DRILL DIAMETER	OVERALL LENGTH	DRILL DEPTH	CARTON
	mm	mm	mm	QTY
QUAD-5.0X110	5.0	110	50	1
QUAD-5.0X160	5.0	160	100	1
QUAD-5.5X110	5.5	110	50	1
QUAD-5.5X160	5.5	160	100	1
QUAD-6.0X110	6.0	110	50	1
QUAD-6.0X160	6.0	160	100	1
QUAD-6.0X210	6.0	210	150	1
QUAD-6.5X110	6.5	110	50	1
QUAD-6.5X160	6.5	160	100	1
QUAD-6.5X210	6.5	210	150	1
QUAD-8.0X110	8.0	110	50	1
QUAD-8.0X160	8.0	160	100	1
QUAD-8.0X210	8.0	210	150	1
QUAD-10.0X110	10.0	110	50	1
QUAD-10.0X160	10.0	160	100	1
QUAD-10.0X210	10.0	210	150	1
QUAD-12.0X160	12.0	160	100	1
QUAD-12.0X210	12.0	210	150	1
QUAD-12.0X260	12.0	260	200	1
QUAD-14.0X260	14.0	260	200	1
QUAD-16.0X260	16.0	260	200	1




**HOLE SAW MANDRELS**



Description

Suits all Flexistrut Bi-metal & TCT Hole saws



PART NO	SHANK	SUIT HOLE SAWS	CARTON
		mm	QTY
HSM-SMALL	HEX 11/32"	14 - 30	1
HSM-LARGE	HEX 7/16"	32 - 152	1


**HOLE SAW PILOT DRILL BITS**



Description

Suits all Flexistrut Bi-metal & TCT Hole saws

Replacement pilot drill bit to suit both small and large mandrels



PART NO	LENGTH	CARTON
	mm	QTY
HSP-SMALL	89	1
HSP-LARGE	114	1

## BI-METAL HOLE SAWS



### Description

Bi-metal construction with 8% Cobalt teeth

Multiple ejection slots to assist with removing cut material

Manufactured for heavy duty applications with smooth, fast and accurate cuts

Cutting depth of 38mm for hole saws up to and including 38mm

Cutting depth of 48mm for hole saws over and including 40mm



Steel

Wood

PART NO	DRILL DIAMETER	CARTON
	mm	QTY
HSBM-14	14	1
HSBM-16	16	1
HSBM-17	17	1
HSBM-19	19	1
HSBM-20	20	1
HSBM-21	21	1
HSBM-22	22	1
HSBM-24	24	1
HSBM-25	25	1
HSBM-27	27	1
HSBM-29	29	1
HSBM-30	30	1
HSBM-32	32	1
HSBM-33	33	1
HSBM-35	35	1
HSBM-37	37	1
HSBM-38	38	1
HSBM-40	40	1
HSBM-41	41	1
HSBM-43	43	1
HSBM-44	44	1
HSBM-45	45	1
HSBM-46	46	1
HSBM-48	48	1
HSBM-50	50	1
HSBM-51	51	1
HSBM-52	52	1
HSBM-54	54	1
HSBM-55	55	1

PART NO	DRILL DIAMETER	CARTON
	mm	QTY
HSBM-57	57	1
HSBM-59	59	1
HSBM-60	60	1
HSBM-64	64	1
HSBM-65	65	1
HSBM-67	67	1
HSBM-68	68	1
HSBM-70	70	1
HSBM-73	73	1
HSBM-75	75	1
HSBM-76	76	1
HSBM-79	79	1
HSBM-83	83	1
HSBM-86	86	1
HSBM-89	89	1
HSBM-92	92	1
HSBM-95	95	1
HSBM-98	98	1
HSBM-100	100	1
HSBM-102	102	1
HSBM-105	105	1
HSBM-108	108	1
HSBM-111	111	1
HSBM-114	114	1
HSBM-121	121	1
HSBM-127	127	1
HSBM-140	140	1
HSBM-146	146	1
HSBM-152	152	1



**TUNGSTEN CARBIDE TIP HOLE SAWS**




**Description**

Tungsten carbide tip hole saws are suitable for multi-purpose applications

Deep ejection slots for easy plug removal

Heavy duty backing plate for increased rigidity

Cutting depth of 60mm



PART NO	DRILL DIAMETER	CARTON
	mm	QTY
HSTCT-16	16	1
HSTCT-20	20	1
HSTCT-22	22	1
HSTCT-25	25	1
HSTCT-27	27	1
HSTCT-30	30	1
HSTCT-32	32	1
HSTCT-35	35	1
HSTCT-38	38	1
HSTCT-40	40	1
HSTCT-44	44	1
HSTCT-50	50	1
HSTCT-54	54	1
HSTCT-57	57	1
HSTCT-60	60	1
HSTCT-64	64	1
HSTCT-68	68	1
HSTCT-73	73	1
HSTCT-76	76	1
HSTCT-80	80	1
HSTCT-83	83	1
HSTCT-89	89	1
HSTCT-92	92	1
HSTCT-102	102	1
HSTCT-111	111	1
HSTCT-114	114	1
HSTCT-125	125	1
HSTCT-152	152	1

## METAL CUT OFF WHEELS



### Description

- Suitable for cutting steel
- High quality material cuts faster and accurately
- Longer lasting, more cuts



Steel

PART NO	DIAMETER	THICKNESS	INTERNAL BORE	MAX RPM	CARTON
	mm	mm	mm		QTY
MC100	100	2.4	16	15,300	25
MC115	115	2.4	22	13,300	25
MC125	125	2.4	22	12,200	25
MC230	230	3.0	22	6,600	25
MC350	350	2.8	25.4	4,400	10

## ULTRA THIN METAL CUT OFF WHEELS



### Description

- Suitable for cutting steel and stainless steel
- Ultra thin material cuts faster, accurately and less material wastage
- Longer lasting, more cuts



Steel



Stainless Steel

PART NO	DIAMETER	THICKNESS	INTERNAL BORE	MAX RPM	CARTON
	mm	mm	mm		QTY
MC100T	105	1.0	16	14,500	25
MC115T	115	1.0	22	13,300	25
MC125T	125	1.0	22	12,200	25
MC230T	230	1.9	22	6,600	25

## METAL GRINDING WHEELS



### Description

- Suitable for steel grinding work
- Surface grinding, welded seams, grouting, chamfering and deburring
- Depressed centre



Steel

PART NO	DIAMETER	THICKNESS	INTERNAL BORE	MAX RPM	CARTON
	mm	mm	mm		QTY
MG100	100	6.0	16	15,300	25
MG115	115	6.0	22	13,300	10
MG125	125	6.0	22	12,200	10
MG230	230	6.0	22	6,600	10



## TURBO RIM WHEELS



### Description


Suitable for concrete, bricks and hebel blocks

High quality diamond tipped edging

Cooling holes to aid blade temperature control

Can be used wet or dry

Not recommended for abrasive materials such as green concrete, asphalt, cement block etc. as extreme premature wear will occur



PART NO	DIAMETER	THICKNESS	BORE	CARTON
	mm	mm	mm	QTY
PTR100	105	2.6	16/20/22	5
PTR115	115	2.6	22.2	5
PTR125	125	2.6	22.2	5

## COLD CUT METAL CUT OFF WHEELS



### Description

Cold cut, no lubricant required

Stays cool during use

Cuts clean, reduces need to deburr

Suits Milwaukee® metal cutting circular saw




PART NO	DIAMETER	THICKNESS	BORE	MAX RPM	NO. TEETH	CARTON
	mm	mm	mm			QTY
MC135	135	1.6	20	4500	30	1

## ABRASIVE FLAP DISCS



### Description

Suitable for multipurpose grinding work  
 Surface grinding and welded seams  
 Aggressive removal performance




PART NO	DIAMETER	INTERNAL BORE	GRIT	MAX RPM	CARTON
	mm	mm			QTY
FLAP100-040	100	16	40	15,300	10
FLAP100-060	100	16	60	15,300	10
FLAP100-080	100	16	80	15,300	10
FLAP100-120	100	16	120	15,300	10
FLAP115-040	115	22	40	13,300	10
FLAP115-060	115	22	60	13,300	10
FLAP115-080	115	22	80	13,300	10
FLAP115-120	115	22	120	13,300	10
FLAP125-040	125	22	40	12,200	10
FLAP125-060	125	22	60	12,200	10
FLAP125-080	125	22	80	12,200	10
FLAP125-120	125	22	120	12,200	10

## ABRASIVE MOPS



### Description

Suitable for working in hard to reach areas  
 Soft and flexible material for a constant removal rate  
 Grinding and deburring



PART NO	DIAMETER	WIDTH	SHAFT	ABRASIVE GRIT	MAX RPM	CARTON
	mm	mm	mm			QTY
ABMOP-040	30	10	6	40	25,400	10
ABMOP-060	30	10	6	60	25,400	10
ABMOP-080	30	10	6	80	25,400	10
ABMOP-120	30	10	6	120	25,400	10



**ABRASIVES**




**Description**

Suitable for cleaning of copper pipe and metal finished with a light abrasion

PART NO	GRIT	WIDTH	LENGTH	CARTON
		mm	mm	QTY
AB180	180	40	5	1
STEELWOOL	-	-	-	1 (8 IN PACK)

**HAND PADS**

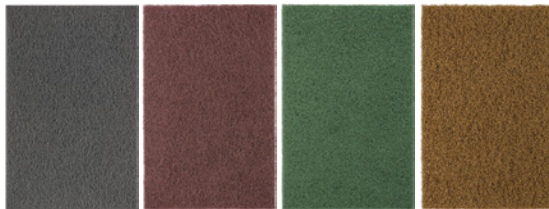


**Description**

Suitable for light grinding, deburring and cleaning work

Roughening for glue points

Can be used wet or dry




PART NO	WIDTH	LENGTH	ABRASIVE GRADE	COLOUR	CARTON
	mm	mm			QTY
HANDPAD-UF	150	230	ULTRA FINE	GREY	10
HANDPAD-VF	150	230	VERY FINE	MAROON	10
HANDPAD-M	150	230	MEDIUM	GREEN	10
HANDPAD-C	150	230	COARSE	TAN	10



## RECIPROCATING SAW BLADES

### Description

Bi-metal reciprocator saw blades with 8% cobalt teeth for flexibility and break resistance





PART NO	SUIT	LENGTH	TEETH PER INCH	CARTON
		mm		QTY
RS-MD10x225	HEAVY METAL DEMOLITION	225	10	5
RS-MD10x300	HEAVY METAL DEMOLITION	300	10	5
RS-M32x150	VERY THIN METAL	150	32	5
RS-M24x150	THIN METAL	150	24	5
RS-M18x150	MEDIUM METAL	150	18	5
RS-M18x225	MEDIUM METAL	225	18	5
RS-M14x150	THICK METAL	150	14	5
RS-M14x225	THICK METAL	225	14	5
RS-WD6x225	HEAVY TIMBER DEMOLITION	225	6	5
RS-WD6x300	HEAVY TIMBER DEMOLITION	300	6	5
RS-WN1014x225	WOOD	225	10 - 14	5
RS-WN1014x280	WOOD	280	10 - 14	5
RS-WTN1014x150	NAIL EMBEDDED WOOD	150	10 - 14	5
RS-WTN1014x225	NAIL EMBEDDED WOOD	225	10 - 14	5
RS-WTN1014x300	NAIL EMBEDDED WOOD	300	10 - 14	5
RS-W6x300	WOOD/PLASTIC	300	6	5
RS-MW1014x150	ALL PURPOSE	150	10 - 14	5
RS-MW1014x225	ALL PURPOSE	225	10 - 14	5
RS-MW1014x300	ALL PURPOSE	300	10 - 14	5
RS-P6x150	PLASTERBOARD	150	6	5

## RECIPROCATING SAW BLADES SET

### Description

Assorted blade sets for demolition or general purpose

Bi-metal reciprocator saw blades with 8% cobalt teeth for flexibility and break resistance

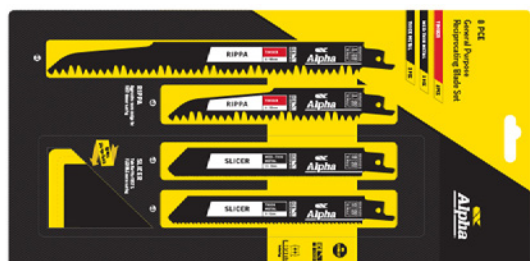

PART NO	DESCRIPTION	CARTON
		QTY
RS-DEMOSET	DEMOLITION 8 PIECE ASSORTED	1
RS-GENPSET	GENERAL PURPOSE 8 PIECE ASSORTED	1



## HACKSAW & BLADES



### Description

High quality hacksaw blades ensure long lasting performance

Heavy duty hacksaw frame with quick release of blade



Steel

PART NO	LENGTH	TEETH PER INCH	CARTON
	mm		QTY
H18T	300	18	100
H24T	300	24	100
H32T	300	32	100
H-FRAME	-	-	1

## JIGSAW BLADES



### Description

High quality jigsaw blades suit most commercial jigsaws T-Shank head



Steel



Wood

PART NO	MAX CUTTING SIZE	LENGTH	SUITS MATERIAL	CARTON
	mm	mm		QTY
JB-118A	1.5 - 3.0	75	THIN METALS	2
JB-118B	3.0 - 6.0	75	MEDIUM THICK METALS	2
JB-101B	Up to 30mm	100	TIMBER	2
JB-144D	Up to 60mm	100	TIMBER	2

## MULTI TOOL BLADE



### Description

Designed with a universal shank to suit most tool brands

High carbon steel material



Steel



Wood

PART NO	SUITS MATERIAL	CARTON
		QTY
MULTI-WOOD	WOOD	1
MULTI-METAL	METAL	1

## ROOF & GUTTER SEALANTS



### Description

Plumbers Silicone Sealant is a non-corrosive neutral cure sealant that can be used on a wide range of substrates. It is ideal for roofing applications, exterior cladding, guttering, flashing, downpipes, general plumbing and is compatible with drinking water storage systems

SDS & VOC available on request

For updated product information see suppliers website

PART NO	BASE MATERIAL	COLOUR	SIZE	CARTON
			g	QTY
SLC-RG-ALUM	SILICONE	ALUMINIUM	300	20
SLC-RG-CLR	SILICONE	CLEAR	300	20
SLC-RG-GREY	SILICONE	GREY	300	20
SLC-RG-BLACK	SILICONE	BLACK	300	20

## KITCHEN & BATHROOM SEALANTS



### Description

Sanitary Silicone Sealant is a premium quality, 100% silicone sealant specifically designed for use in wet areas where a neutral cure sealant is required that contains a mould and mildew inhibitor. Sanitary Silicone a professional quality wet area sealant that provides excellent adhesion and is suitable for contact with aluminium shower screens and other substrates susceptible to corrosion

SDS & VOC available on request

For updated product information see suppliers website

PART NO	BASE MATERIAL	COLOUR	SIZE	CARTON
			g	QTY
SLC-KB-CLR	SILICONE	CLEAR	300	20
SLC-KB-WHITE	SILICONE	WHITE	300	20

## DUCT SEALANTS



### Description

Water based duct sealants

Available in cartridge and 4LT bulk

SDS & VOC available on request

For updated product information see suppliers website

PART NO	BASE MATERIAL	COLOUR	SIZE	CARTON
			ml	QTY
FLEXIDUCT	WATER BASED	GREY	420	20
FLEXIDUCT-4LT	WATER BASED	GREY	4000	1



## FIRE RATED SEALANTS



### Description

Assorted fire rated sealants  
(Request tech data for suitability of application)

Available in cartridges and sausages

SDS & VOC available on request  
For updated product information see suppliers website

PART NO	BASE MATERIAL	COLOUR	TYPE	SIZE	CARTON
				g	QTY
SLC-FCACR	ACRYLIC	GREY	CARTRIDGE	450	20
SSG-FCACR	ACRYLIC	GREY	SAUSAGE	600	15
SSG-FIREBAN	POLYURETHANE	GREY	SAUSAGE	600	20
SLC-BOSS-GREY	ACRYLIC	GREY	CARTRIDGE	310	12
SSG-BOSS-GREY	ACRYLIC	GREY	SAUSAGE	600	12
SLC-HBF260	SILICONE	RED	CARTRIDGE	300	6

## POLYURETHANE SEALANTS



### Description

Assorted polyurethane sealants  
(request tech data for suitability of application)

Available in cartridges and sausages

SDS & VOC available on request  
For updated product information see suppliers website

PART NO	BASE MATERIAL	COLOUR	SIZE	CARTON
			g	QTY
SLC-POLY-GREY	POLYURETHANE	GREY	380	20
SLC-POLY-WHITE	POLYURETHANE	WHITE	380	20
SLC-SIKA-GREY	POLYURETHANE	GREY	380	12
SLC-SIKA-WHITE	POLYURETHANE	WHITE	380	12
SSG-POLY-GREY	POLYURETHANE	GREY	600	20
SSG-SIKA-GREY	POLYURETHANE	GREY	600	20

## GAP FILLER



### Description

FulaFill™ Multi-Purpose Gap Filler is a premium quality, acrylic gap filler designed for general purpose interior and exterior gap filling prior to painting

Its non-slump formula makes it easy to apply and clean-up is just as simple.

For updated product information see suppliers website

PART NO	BASE MATERIAL	COLOUR	SIZE	CARTON
			g	QTY
GAPFILLER	ACRYLIC	WHITE	450	20

## PROMASEAL® 'A' SEALANT



### Description

PROMASEAL®-A Acrylic Sealant is a water based acrylic sealant. The advantage of this environmentally friendly water based sealant is in making post installation and site clean up easier.

If installed correctly, once cured PROMASEAL®-A Acrylic Sealant should not crack and it can be simply overpainted. It has a good resistance to water characteristics and some movement capabilities.

PART NO	BASE MATERIAL	COLOUR	SIZE	TYPE	CARTON
			ml		QTY
SLC-A-GREY	ACRYLIC	GREY	300	CARTRIDGE	12
SSG-A-GREY	ACRYLIC	GREY	600	SAUSAGE	12

## PROMASEAL® 'AG' SEALANT




### Description

PROMASEAL®-AG Acrylic Intumescent Sealant is a water based sealant designed for use with copper pipes with combustible and non-combustible insulation as well as with selected plastic pipes to prevent the spread of smoke, fire and heat

It expands when heat is applied to it filling the penetration and taking up the space of any service or insulation that melts leaving an opening. It can be painted after 24 hours of installation

PART NO	BASE MATERIAL	COLOUR	SIZE	CARTON
			ml	QTY
SSG-AG-GREY	ACRYLIC	GREY	600	12

## SEALANT TOOLS

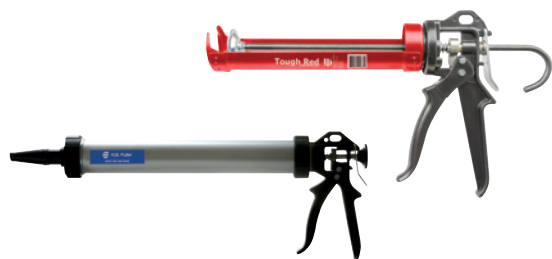

### Description

Array of installation tools for cartridge and sausage type sealants

Nozzles to suit cartridges and sausages

PART NO	DESCRIPTION	CARTON
		QTY
SLC-GUN	STANDARD SILICONE GUN	1
SLC-GUNHD	HEAVY DUTY SILICONE GUN	1
SSG-GUN	HEAVY DUTY SAUSAGE GUN	1
SLC-NOZZLE	SILICONE NOZZLES	10
SSG-NOZZLE	SAUSAGE NOZZLES	10



## EXPANSION FOAMS



### Description

Expanding PU Foam, in general purpose and fire rated variants

Data sheets available on request for suitability

CFC-Free propellant, self expanding and ready to use

Fire Rated Foam has been tested as a vertical linear gap sealant in concrete block and concrete walls

For fire rated applications please ensure that the Technical Data Sheet is reviewed and approved by a fire design consultant prior to using the product

PART NO	DESCRIPTION	SIZE	CARTON
		ml	QTY
EXPFOAM	GENERAL PURPOSE FOAM	750	12
EXPFOAM-FR	FIRE RATED FOAM	750	12

## NON SHRINK GROUT



### Description

Suitable for void filling

General purpose, non shrink construction grout

Ready to use pre mix, only requires water

PART NO	SIZE	CARTON
	kg	QTY
GROUT	20	1

## HAND PROTECTION




### Description

High quality Australian standard gloves  
Wide selection for best choice of application

Ronin = Generic purpose  
Rigger = Leather riggers  
Razor 3+5 = Cut resistance  
F/less = Fingerless  
F/less2 = 2 Fingerless  
Cotton = Poly cotton

PART NO	SIZE	ABRASION	CUT COUP TEST	TEAR	PUNCTURE	CUT TDM TEST	CARTON
							QTY
RONIN-SML	SML	4	1	3	1	X	12
RONIN-MED	MED	4	1	3	1	X	12
RONIN-LGE	LGE	4	1	3	1	X	12
RONIN-XL	XL	4	1	3	1	X	12
RIGGER-MED	MED	2	1	2	3	X	12
RIGGER-LGE	LGE	2	1	2	3	X	12
RIGGER-XL	XL	2	1	2	3	X	12
RAZOR3-MED	MED	4	X	3	1	C	12
RAZOR3-LGE	LGE	4	X	3	1	C	12
RAZOR3-XL	XL	4	X	3	1	C	12
RAZOR5-MED	MED	4	X	4	3	D	12
RAZOR5-LGE	LGE	4	X	4	3	D	12
RAZOR5-XL	XL	4	X	4	3	D	12
F/LESS-MED	MED	2	1	4	2	X	12
F/LESS-LGE	LGE	2	1	4	2	X	12
F/LESS-XL	XL	2	1	4	2	X	12
F/LESS2-MED	MED	3	1	3	1	X	12
F/LESS2-LGE	LGE	3	1	3	1	X	12
F/LESS2-XL	XL	2	1	3	1	X	12
COTTON-LGE	LGE	-	-	-	-	-	12

## GLOVE CLIP



### Description

The lower plastic jaw enables one to hold onto gloves securely

The link arm is engineered to detach if the gloves become entangled

PART NO	CARTON
	QTY
GLOVECLIP	10



## HEARING PROTECTION



### Description

High quality Australian standard earplugs and earmuffs to provide the best protection

Comfortable and durable

High visibility colours

PART NO	DECIBEL	RATING	CARTON
			QTY
EARMUFF	31	CLASS 5	25
EARPLUG	26	CLASS 5	1 (200 IN BOX)
EARPLUG-CORD	26	CLASS 5	1 (100 IN BOX)
EARPLUG-FRM	25	CLASS 5	10
EARPLUG-RPL	25	CLASS 5	50

## RESPIRATORY PROTECTION



### Description

High quality Australian standard face masks

P2 rated with valve

N95 and non valve available on request

PART NO	RATING	CARTON
		QTY
P2-VALVE	P2	1 (10 IN BOX)

## EYE PROTECTION



### Description

High quality Australian standard glasses, goggles and face shields

Anti scratch and anti fog material for durability and function

Entry level range, not compromising in comfort or safety

High level specs available on request

PART NO	ANTI SCRATCH	ANTI FOG	UV TREATED	CARTON
				QTY
SG-CLEAR	✓	✓	✓	12
SG-SMOKE	✓	✓	✓	12
GOGGLE	✓	✓	✓	12
FACESHIELD	✓	✓	✓	1
VADAR	✓	✓	✓	1



## HARD HATS



### Description

#### HARDHAT

High quality Australian standard hard hat  
6 point safety connection, vented for comfort

#### SWEATBAND

Replaceable hardhat sweatband  
Cotton material  
Suits most branded hardhats

PART NO	COLOUR	SIZE	CARTON
			QTY
HARDHAT	WHITE	ONE SIZE FITS ALL	20
SWEATBAND	BLACK	ONE SIZE FITS ALL	1 (5 in pack)

## VISUAL PROTECTION



### Description

High visibility day time safety vests

All large sizing, other sizes available on request

PART NO	COLOUR	RATING	CARTON
			QTY
VEST-Y	YELLOW	DAY ONLY	50
VEST-O	ORANGE	DAY ONLY	50

## TOOL LANYARD



### Description

Safety tool lanyards with a range of safe working loads

Reduces the risk of tools dropping, can be tethered to a wide variety of tools and equipment

PART NO	LOAD RATING	LENGTH	CARTON
	kg	mm	QTY
LANYARD-4.5	4.5	900	1
LANYARD-6.8	6.8	900	1
LANYARD-15.0	15.0	900	1



## FIRE EXTINGUISHER



### Description

ABE Dry Chemical

Includes bracket for wall mounting

See fire extinguisher for suitable use and applications

PART NO	POWDER	WEIGHT	CARTON
		kg	QTY
FREXT-1KG	DRY	1	1
FREXT-2KG	DRY	2	1

## PADLOCKS



### Description

For general purpose lock up

Available in three shackle diameters

Other sizes available on request

PART NO	SHACKLE DIAMETER	CARTON
	mm	QTY
PADLOCK-25	25	1
PADLOCK-40	40	1
PADLOCK-50	50	1

## SPRAY + MARK PAINT



### Description

Coloured spray cans for floor / spot marking paint

Toluene free formula

Other colours available on request

PART NO	COLOUR	SIZE	CARTON
		g	QTY
SP-BLUE	BLUE	350	12
SP-RED	RED	350	12
SP-GREEN	GREEN	350	12
SP-ORANGE	ORANGE	350	12
SP-YELLOW	YELLOW	350	12
SP-PINK	PINK	350	12
SP-WHITE	WHITE	350	12

## SPRAY CANS - ENAMEL + PROTECTION



### Description

Black and Silver enamel paint for concealment and touch up

High quality zinc and cold gal paints for excellent surface protection

PART NO	COLOUR	SIZE	CARTON
		g	QTY
SP-BLACK	FLAT BLACK	325	12
SP-SILVER	SILVER GLOSS	325	12
SP-ZINC	ZINC	400	12
SP-COLDGAL	COLDGAL	400	12

## PENCILS/CRAYONS



### Description

High quality builders markers

Crayons are available in other colours on request

PART NO	COLOUR	LEAD HARDNESS	LENGTH	CARTON
			mm	QTY
PENCIL	GREY	MEDIUM	180	12
CRAYON	YELLOW	-	110	12



## MARKERS



### Description

Available in a range of colours and tip points to suit all applications

Inkzall markers are best suited for writing on greasy applications eg: ductwork

PART NO	COLOUR	TIP	CARTON
			QTY
MARKER-BLKB	BLACK	BULLET	12
MARKER-BLKC	BLACK	CHISEL	12
MARKER-170B	BLUE	BULLET	12
MARKER-YLW	YELLOW	PAINT	12
MARKER-WHT	WHITE	PAINT	12
MARKER-BLK	BLACK	PAINT	12
INKZALL-BLK	BLACK	FINE POINT	36
INKZALL-RED	RED	FINE POINT	36
INKZALL-BLUE	BLUE	FINE POINT	36
INKZALL-GREEN	GREEN	FINE POINT	36

## CHALK LINES



### Description

Chalkline reel with 30M string line

Chalk refill available in three colours and stain durability

Other colours available on request

PART NO	LENGTH	SIZE	COLOUR	DURABILITY	CARTON
	M	oz			QTY
CHALKLINE	30	-	-	-	1
CHALK-RED	-	8	RED	LIGHT	1
CHALK-BLUE	-	8	BLUE	MED	1
CHALK-BLACK	-	8	BLACK	HEAVY	1

## RIVETS ALUMINUM/STEEL



## Description

5050 Grade aluminium body, low carbon zinc plated steel mandrel

Dome head for a clean finish

Can be installed using handheld and battery operated rivet guns

PART NO	BODY DIAMETER	GRIP RANGE	DRILL GAUGE	CARTON
	mm	mm		QTY
AS42	3.2	1.6 - 3.2	#30	1000
AS43	3.2	3.2 - 4.8	#30	1000
AS44	3.2	4.8 - 6.4	#30	1000
AS46	3.2	7.9 - 9.5	#30	1000
AS48	3.2	9.5 - 12.7	#30	1000
AS52	4.0	0.5 - 3.2	#20	1000
AS53	4.0	3.2 - 4.8	#20	1000
AS54	4.0	4.8 - 6.4	#20	1000
AS56	4.0	7.9 - 9.5	#20	500
AS58	4.0	9.5 - 12.7	#20	500
AS62	4.8	0.5 - 3.2	#11	500
AS63	4.8	3.2 - 4.8	#11	500
AS64	4.8	4.8 - 6.4	#11	500
AS66	4.8	7.9 - 9.5	#11	500
AS68	4.8	9.5 - 12.7	#11	500



## RIVETS STEEL/STEEL



### Description

1010 Grade steel body, low carbon zinc plated steel mandrel

Dome head for a clean finish

Can be installed using handheld and battery operated rivet guns

PART NO	BODY DIAMETER	GRIP RANGE	DRILL SIZE	CARTON
	mm	mm		QTY
SS42	3.2	1.6 - 3.2	1/8" #30	1000
SS43	3.2	3.2 - 4.8	1/8" #30	1000
SS44	3.2	4.8 - 6.4	1/8" #30	1000
SS46	3.2	7.9 - 9.5	1/8" #30	1000
SS53	4.0	3.2 - 4.8	5/32" #20	1000
SS54	4.0	4.8 - 6.4	5/32" #20	1000
SS56	4.0	6.4 - 9.5	5/32" #20	500
SS62	4.8	0.5 - 3.2	3/16" #11	500
SS63	4.8	3.2 - 4.8	3/16" #11	500
SS64	4.8	4.8 - 6.4	3/16" #11	500
SS66	4.8	6.4 - 9.5	3/16" #11	500
SS68	4.8	9.5 - 12.7	3/16" #11	500

## RIVET TOOL



### Description

Suits all rivets aluminium/steel and steel/steel configuration

Forged steel handle and ergonomic one hand grip design

PART NO	SUITS RIVETS	CARTON
		QTY
RIVET-GUN	2.4 - 4.0 S/S	1
	2.4 - 4.8 A/S	

## HEX HEAD SELF DRILLING SCREWS CLASS 4



### Description

Suitable to drill into steel materials

- 10g up to 3.5mm thick
- 12g up to 4.5mm thick
- 14g up to 5.0mm thick

Self drilling tip, no need to pre drill

CL4 coating provides resistance to the elements


Hex nut setter installation bit required



Steel

PART NO	GAUGE	THREAD PER INCH	LENGTH	FINISH	HEAD	CARTON
			mm			QTY
M-10X16CL4	10	16	16	C4	HEX 5/16"	1000
M-10X25CL4	10	16	25	C4	HEX 5/16"	1000
M-12X20CL4	12	14	20	C4	HEX 5/16"	500
M-12X25CL4	12	14	25	C4	HEX 5/16"	1000
M-12X35CL4	12	14	35	C4	HEX 5/16"	1000
M-12X45CL4	12	14	45	C4	HEX 5/16"	1000
M-14X22CL4	14	14	22	C4	HEX 3/8"	1000
M-14X65CL4	14	10	65	C4	HEX 3/8"	1000

## HEX HEAD SELF DRILLING SCREWS WITH NEO CLASS 4



### Description

Suitable to drill into steel materials

- 10g up to 3.5mm thick
- 12g up to 4.5mm thick

Self drilling tip, no need to pre drill

CL4 coating provides resistance to the elements

Hex nut setter installation bit required

Rubber washer provides seal between screw and fixing



Steel

PART NO	GAUGE	THREAD PER INCH	LENGTH	FINISH	HEAD	CARTON
			mm			QTY
M-10X16CL4N	10	16	16	C4	HEX 5/16"	1000
M-10X25CL4N	10	16	25	C4	HEX 5/16"	1000
M-12X45CL4N	12	14	45	C4	HEX 5/16"	1000
M-12X65CL4N	12	14	65	C4	HEX 5/16"	1000

**HEX HEAD EXTENDED TIP NO. 5 SELF DRILLING SCREW****Description**

Suitable to drill into heavy steel materials up to 12mm thick

Self drilling tip, no need to pre drill


CL4 coating provides resistance to the elements

Hex Nut setter installation bit required



Steel

PART NO	GAUGE	THREAD PER INCH	LENGTH	CLASS	HEAD	CARTON
			mm			QTY
M-EXT-32CL4	12	24	32	C4	HEX 5/16"	500
M-EXT-50CL4	12	24	50	C4	HEX 5/16"	1000
M-EXT-65CL4	12	24	65	C4	HEX 5/16"	1000

**HEX HEAD SELF DRILLING SCREWS ZINC****Description**

Suitable to drill into steel materials up to 3.5mm thick

Self drilling tip, no need to pre drill


Zinc yellow coating allows for a sharp drill point for ease of installation

Hex nut setter installation bit required



Steel

PART NO	GAUGE	THREAD PER INCH	LENGTH	FINISH	HEAD	CARTON
			mm			QTY
M-10X16ZY	10	16	16	ZY	HEX 5/16"	1000
M-10X25ZY	10	16	25	ZY	HEX 5/16"	1000
M-12X20ZY	12	14	20	ZY	HEX 5/16"	500
M-12X35ZY	12	14	35	ZY	HEX 5/16"	1000
M-12X45ZY	12	14	45	ZY	HEX 5/16"	1000

**HEX HEAD SELF DRILLING SCREWS ZINC****Description**

Available EX Stock NSW only

Suitable to drill into steel materials up to 3.5mm thick

Self drilling tip, no need to pre drill

Zinc clear coating

Hex nut setter installation bit required



Steel

PART NO	GAUGE	THREAD PER INCH	LENGTH	FINISH	HEAD	CARTON
			mm			QTY
M-10X16ZC	10	16	16	ZC	HEX 5/16"	1000
M-10X25ZC	10	16	25	ZC	HEX 5/16"	1000



## BUTTON HEAD SELF DRILLING SCREWS ZINC



### Description

Suitable to drill into steel materials up to 2.5mm thick

Self drilling tip, no need to pre drill

Zinc yellow coating allows for a sharp drill point for ease of installation

Phillips #2 installation bit required



Steel

PART NO	GAUGE	THREAD PER INCH	LENGTH	FINISH	HEAD	CARTON
			mm			QTY
M-BH12ZY	8	18	12	ZY	PHILLIPS NO 2.	1000
M-BH16ZY	8	18	16	ZY	PHILLIPS NO 2.	1000
M-BH20ZY	8	18	20	ZY	PHILLIPS NO 2.	1000
M-BH25ZY	8	18	25	ZY	PHILLIPS NO 2.	1000
M-BH32ZY	8	18	32	ZY	PHILLIPS NO 2.	1000

## PAN HEAD SELF DRILLING SCREWS ZINC



### Description

Suitable to drill into steel materials up to 2.5mm thick

Self drilling tip, no need to pre drill

Zinc yellow coating allows for a sharp drill point for ease of installation

Phillips #2 installation bit required



Steel

PART NO	GAUGE	THREAD PER INCH	LENGTH	CLASS	HEAD	CARTON
			mm			QTY
M-PAN8X12ZY	8	18	12	ZY	PHILLIPS NO 2.	1000
M-PAN8X20ZY	8	18	20	ZY	PHILLIPS NO 2.	1000

## BUGLE HEAD SELF DRILLING SCREWS ZINC



### Description

Suitable to drill into steel materials up to 2.3mm thick

Self drilling tip, no need to pre drill

Zinc yellow coating allows for a sharp drill point for ease of installation

Phillips #2 installation bit required



Steel

PART NO	GAUGE	THREAD PER INCH	LENGTH	FINISH	HEAD	CARTON
			mm			QTY
M-BUGLE6X25ZY	6	20	25	ZY	PHILLIPS NO 2.	1000
M-BUGLE6X32ZY	6	20	32	ZY	PHILLIPS NO 2.	1000
M-BUGLE6X45ZY	6	20	45	ZY	PHILLIPS NO 2.	1000

**FLAT TOP SELF DRILLING SCREWS CLASS 3****Description**

Suitable to drill into steel materials up to 3mm thick

Self drilling tip, no need to pre drill

CL3 coating provides resistance to the elements

Phillips #2 installation bit required



Steel

PART NO	GAUGE	THREAD PER INCH	LENGTH	FINISH	HEAD	CARTON
			mm			QTY
M-FLAT10X16CL3	10	16	16	C3	PHILLIPS NO 2.	1000

**FLAT TOP SELF DRILLING SCREWS ZINC****Description**

Suitable to drill into steel materials up to 3mm thick

Self drilling tip, no need to pre drill

Zinc yellow coating allows for a sharp drill point for ease of installation

Phillips #2 installation bit required



Steel

PART NO	GAUGE	THREAD PER INCH	LENGTH	FINISH	HEAD	CARTON
			mm			QTY
M-FLAT10X16ZY	10	16	16	ZY	PHILLIPS NO 2.	1000

## HEX HEAD TYPE 17 SCREWS CLASS 4



### Description

Suitable to drill into timber materials

T17 tip, no need to pre drill

CL4 coating provides resistance to the elements

Hex Nut setter installation bit required



Wood

PART NO	GAUGE	THREAD PER INCH	LENGTH	FINISH	HEAD	CARTON
			mm			QTY
W-10X20CL4	10	12	20	C4	HEX 5/16"	1000
W-10X25CL4	10	12	25	C4	HEX 5/16"	1000
W-10X30CL4	10	12	30	C4	HEX 5/16"	1000
W-12X25CL4	12	11	25	C4	HEX 5/16"	500
W-12X30CL4	12	11	30	C4	HEX 5/16"	1000
W-12X40CL4	12	11	40	C4	HEX 5/16"	1000
W-12X50CL4	12	11	50	C4	HEX 5/16"	1000
W-14X65CL4	14	10	65	C4	HEX 3/8"	1000
W-14X75CL4	14	10	75	C4	HEX 3/8"	1000

## HEX HEAD TYPE 17 SCREWS WITH NEO CLASS 4



### Description

Suitable to drill into timber materials

T17 tip, no need to pre drill

CL4 coating provides resistance to the elements

Hex Nut setter installation bit required

Rubber washer provides seal between screw and fixing



Wood

PART NO	GAUGE	THREAD PER INCH	LENGTH	FINISH	HEAD	CARTON
			mm			QTY
W-12X45CL4N	12	11	45	C4	HEX 5/16"	1000
W-12X50CL4N	12	11	50	C4	HEX 5/16"	1000
W-12X65CL4N	12	11	65	C4	HEX 5/16"	1000



## HEX HEAD TYPE 17 SCREWS ZINC



## Description

Suitable to drill into timber materials

T17 tip, no need to pre drill

Zinc yellow coating allows for a sharp drill point for ease of installation

Hex Nut setter installation bit required



Wood

PART NO	GAUGE	THREAD PER INCH	LENGTH	FINISH	HEAD	CARTON
			mm			QTY
W-10X25ZY	10	11	25	ZY	HEX 5/16"	1000
W-12X25ZY	12	11	25	ZY	HEX 5/16"	1000
W-12X35ZY	12	11	35	ZY	HEX 5/16"	1000
W-12X40ZY	12	11	40	ZY	HEX 5/16"	1000
W-12X45ZY	12	11	45	ZY	HEX 5/16"	1000
W-12X50ZY	12	11	50	ZY	HEX 5/16"	1000
W-12X65ZY	12	11	65	ZY	HEX 5/16"	1000

## BUTTON HEAD NEEDLE POINT SCREWS ZINC



## Description

Suitable to drill into light gauge steel up to 0.75mm thick and timber materials

Needle point tip, no need to pre drill

Zinc yellow coating allows for a sharp drill point for ease of installation

Phillips #2 installation bit required



Light Gauge Steel

Wood

PART NO	GAUGE	THREAD PER INCH	LENGTH	FINISH	HEAD	CARTON
			mm			QTY
W-STITCH8X12ZY	8	15	12	ZY	PHILLIPS NO 2.	1000
W-STITCH8X15ZY	8	15	15	ZY	PHILLIPS NO 2.	1000
W-STITCH8X20ZY	8	15	20	ZY	PHILLIPS NO 2.	1000
W-STITCH8X25ZY	8	15	25	ZY	PHILLIPS NO 2.	1000
W-STITCH8X32ZY	8	15	32	ZY	PHILLIPS NO 2.	1000

## CHIPBOARD SCREWS ZINC



### Description

Suitable to drill into timber materials

Self embedding tip, no need to pre drill

Zinc yellow coating allows for a sharp drill point for ease of installation

Phillips #2 installation bit required



PART NO	GAUGE	THREAD PER INCH	LENGTH	FINISH	HEAD	CARTON
			mm			QTY
W-CHIP8X20ZY	8	9	20	ZY	PHILLIPS NO 2.	1000
W-CHIP8X25ZY	8	9	25	ZY	PHILLIPS NO 2.	1000
W-CHIP8X32ZY	8	9	32	ZY	PHILLIPS NO 2.	1000
W-CHIP8X35ZY	8	9	35	ZY	PHILLIPS NO 2.	1000

## BUGLE NEEDLE POINT SCREWS ZINC



### Description

Suitable to drill into light gauge steel up to 0.75mm thick and timber materials

Needle point tip, no need to pre drill

Zinc yellow coating allows for a sharp drill point for ease of installation

Phillips #2 installation bit required



PART NO	GAUGE	THREAD PER INCH	LENGTH	FINISH	HEAD	CARTON
			mm			QTY
W-BUGLE6X25ZY	6	18	25	ZY	PHILLIPS NO 2.	1000
W-BUGLE6X41ZY	6	18	41	ZY	PHILLIPS NO 2.	1000
W-BUGLE7X20ZY	7	15	20	ZY	PHILLIPS NO 2.	1000
W-BUGLE7X25ZY	7	15	25	ZY	PHILLIPS NO 2.	1000
W-BUGLE7X32ZY	7	15	32	ZY	PHILLIPS NO 2.	1000
W-BUGLE7X45ZY	7	15	45	ZY	PHILLIPS NO 2.	1000
W-BUGLE7X50ZY	7	15	50	ZY	PHILLIPS NO 2.	1000



## FLAT TOP NEEDLE POINT SCREWS ZINC



### Description

Suitable to drill into light gauge steel up to 1.2mm thick and timber materials

Needle point tip, no need to pre drill

Zinc yellow coating allows for a sharp drill point for ease of installation

Phillips #2 installation bit required



PART NO	GAUGE	THREAD PER INCH	LENGTH	FINISH	HEAD	CARTON
			mm			QTY
W-FLAT10X16ZY	10	15	16	ZY	PHILLIPS NO 2.	1000

## PAN HEAD NEEDLE POINT SCREWS ZINC



### Description

Suitable to drill into light gauge steel up to 0.75mm thick and timber materials

Needle point tip, no need to pre drill


Zinc yellow coating allows for a sharp drill point for ease of installation

Phillips #2 installation bit required



PART NO	GAUGE	THREAD PER INCH	LENGTH	FINISH	HEAD	CARTON
			mm			QTY
W-PAN6X20ZY	6	15	20	ZY	PHILLIPS NO 2.	1000
W-PAN7X12ZY	7	16	12	ZY	PHILLIPS NO 2.	1000
W-PAN7X20ZY	7	16	20	ZY	PHILLIPS NO 2.	1000
W-PAN7X25ZY	7	16	25	ZY	PHILLIPS NO 2.	1000
W-PAN7X30ZY	7	16	30	ZY	PHILLIPS NO 2.	1000
W-PAN7X40ZY	7	16	40	ZY	PHILLIPS NO 2.	1000
W-PAN7X50ZY	7	16	50	ZY	PHILLIPS NO 2.	500

## PLASTER BITE PLASTERBOARD ANCHORS



### Description

The Plaster Bite plasterboard anchor is a small, self-drilling anchor used to provide a secure attachment point for screws in plasterboard. It features a tapered body and large threads to provide maximum grip and stability



PART NO	GAUGE	FINISH	CARTON
			QTY
ZIPIT-N	6 - 8	NYLON	100
ZIPIT-Z	6 - 8	ZINC	100

## PAN HEAD PHILLIPS SCREWS




### Description

Screws to suit plasterboard anchors are specially designed screws used to secure the anchor in place

They feature a coarse thread and a sharp point for easy insertion into the anchor

PART NO	LENGTH	GAUGE	FINISH	CARTON
	mm			QTY
ZIPIT-SCREW	25	8	ZINC	1000

## SPRING TOGGLE ROUND HEAD

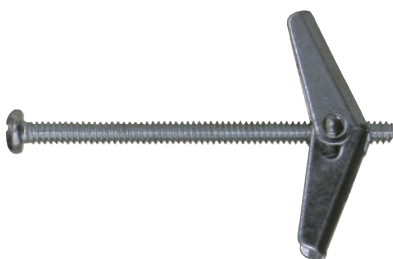

### Description

Light duty fixing suitable for plasterboard substrates

Inexpensive and traditional fixing for light duty applications



PART NO	DRILL DIAMETER	MAXIMUM FIXTURE	FINISH	CARTON
	mm	mm		QTY
ST1/8X2	10.0	30	ZINC	50
ST1/8X3	10.0	50		50
ST3/16X2	13.0	24		50
ST3/16X3	13.0	48		50
ST3/16X4	13.0	74		50



## HOLLOW WALL ANCHORS



### Description

Light duty fixing suitable for plasterboard substrates

Low profile flush head for a clean finish

Install requires P/N #HWA-SET hand held installation tool



PART NO	DRILL DIAMETER	FIXTURE	FINISH	CARTON
	INCH			mm
HWA4S	1/8	3 - 6	ZINC	100
HWA4SL	1/8	10 - 12	ZINC	100

## HOLLOW WALL ANCHOR SETTING TOOL



### Description

Required to install hollow wall anchors

High quality and lightweight

Controlled expansion

PART NO	CARTON
	QTY
HWA-SET	1

## DOG-BITES®




### Description

Dog-Bites® screw suitable for light duty applications

Suitable in most base material (load rating varies)

Zinc clear, Carbon steel body



PART NO	DRILL DIAMETER	LENGTH	HEAD	CARTON
	mm			mm
WDOG-32	5.0	32	PHILLIPS NO 2.	100
WDOG-32SQR	5.0	32	SQUARE NO 2.	100



## NYLON ANCHOR ROUND HEAD



### Description

Light duty fixing suitable for concrete substrates

Inexpensive and traditional fixing for light duty applications

Removable pin and pre formed nylon body

Zinc yellow pin



Concrete

PART NO	DRILL DIAMETER	MAXIMUM FIXTURE	LENGTH	CARTON
	mm	mm	mm	QTY
RN0525	5.0	6.5	25	100
RN0540	5.0	19	40	100
RN6525	6.5	6.5	25	100
RN6538	6.5	19	38	100
RN6550	6.5	32	50	100

## NYLON ANCHOR MUSHROOM HEAD



### Description

Light duty fixing suitable for concrete substrates

Inexpensive and traditional fixing for light duty applications

Removable pin and pre formed nylon body

Zinc yellow pin



Concrete

PART NO	DRILL DIAMETER	MAXIMUM FIXTURE	LENGTH	CARTON
	mm	mm	mm	QTY
MN0525	5.0	6.5	25	100
MN0540	5.0	19	40	100
MN6525	6.5	6.5	25	100
MN6538	6.5	19	38	100
MN6550	6.5	32	50	100
MN6575	6.5	50	75	100




**METAL WEDGE ANCHORS**



**Description**

All metal, Zinc clear, carbon steel construction  
 AS5216 compliant  
 Fire rated performance  
 Tamper resistant head




PART NO	DRILL DIAMETER	MAXIMUM FIXTURE	LENGTH	CARTON
	mm	mm	mm	QTY
PBZ0635	6.0	3	35	200
PBZ0665	6.0	33	65	100

**METAL PIN ANCHORS**



**Description**

Suitable for light duty applications  
 Zinc clear, Carbon steel pin  
 Zamak alloy body  
**NOT TO BE USED OVERHEAD**




PART NO	DRILL DIAMETER	MAXIMUM FIXTURE	LENGTH	CARTON
	mm	mm	mm	QTY
MPA0522	5.0	6.5	22	100
MPA6520	6.5	6.5	20	100
MPA6525	6.5	10	25	100
MPA6532	6.5	17	32	100
MPA6538	6.5	23	38	100
MPA6550	6.5	35	50	100

**WALL PLUG**



**Description**

Light duty fixing suitable for concrete substrates  
 Inexpensive and traditional fixing for light duty applications



PART NO	LENGTH	DRILL DIAMETER	SCREW GAUGE	COLOUR	CARTON
	mm	mm			QTY
WPLUG-R25	25	6.0	8	RED	25
WPLUG-R30	30	6.0	8	RED	25
WPLUG-R38	38	6.0	8	RED	25
WPLUG-R50	50	6.0	8	RED	25
WPLUG-G25	25	7.0	10 - 12	GREEN	25
WPLUG-G30	30	7.0	10 - 12	GREEN	25
WPLUG-G38	38	7.0	10 - 12	GREEN	25
WPLUG-G50	50	7.0	10 - 12	GREEN	25

## PURE EPOXY INJECTION SYSTEM



### Description

#### ICCONS BIS-PE GEN3 PURE EPOXY ADHESIVE


3:1 EXTREME performance pure epoxy

100 Year design life in accordance with EAD 330499-01-0601

Working time 30min @ 20-24°C

Curing time 12hrs dry holes

See manufacturers tech data sheets for full specifications



PART NO	SIZE	CARTON
	ml	QTY
CHEM-PE585	585	12

## HYBRID INJECTION SYSTEM



### Description

#### ICCONS BIS-HY GEN2 HYBRID ADHESIVE

Rapid cure EXTREME performance Hybrid

100 year design life in accordance with EAD 330499-01-0601

Working time 3min @ 20-24°C

Curing time 30min dry holes

See manufacturers tech data sheets for full specifications



PART NO	SIZE	CARTON
	ml	QTY
CHEM-HY420	420	12
CHEM-HY280	280	12

## INJECTION SYSTEM DISPENSING TOOL



### Description

4 in 1 Dispensing tool, fits entire injection range

PART NO	DESCRIPTION	CARTON
		QTY
CHEM-MULTI	MULTI TOOL FOR PURE EPOXY AND HYBRID	1



## CHEMICAL ANCHORING THREADED STUDS



### Description

Class 5.8 Carbon Steel Galvanised

Hex Drive threaded studs

Suit Pure Epoxy & Hybrid Injection Systems

Threaded studs manufactured to industry standard lengths

Complete with 1 x nut & washer




Concrete

PART NO	THREAD	LENGTH	DRILL DIAMETER	MIN ANCHOR EMBEDMENT	MAX FIXTURE THICKNESS	CARTON
		mm	mm	mm	mm	QTY
CPS08110G	M8	110	10	80	17	10
CPS10130G	M10	130	12	90	28	10
CPS12160G	M12	160	14	110	36	10
CPS16190G	M16	190	18	125	42	10
CPS20260G	M20	260	22	170	72	5
CPS24300G	M24	300	28	210	66	5



Visit the ICCONS adhesive calculator below

<https://www.iccons.com.au/software/adhesive-volume-calculator>

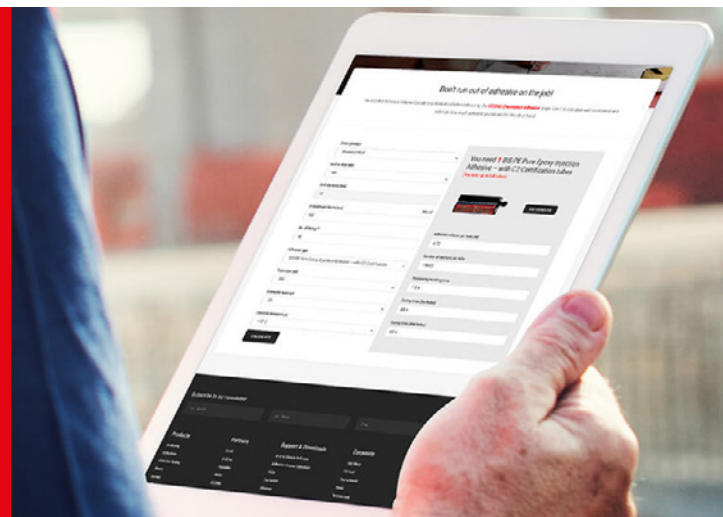

## DROP IN ANCHORS LIPPED



### Description

#### ICCONS DLXTM DROP-IN ANCHOR

Suitable to fasten threaded rod and bolts into solid core material

Must use correct FM1820-SET setting tool during installation

Carbon Steel with Zinc clear finish

Suitable for indoor use

ETA approved and AS5216:2021 compliant

Lipped edge to prevent over embedment and neat finish

Stainless steel available on request



Fire Rated

Concrete

PART NO	DRILL DIAMETER	DRILL DEPTH	INTERNAL THREAD	CARTON
	mm	mm		QTY
FM1820-1025L	12.0	27	M10	50
FM1820-1030L	12.0	32	M10	50
FM1820-1040L	12.0	42	M10	50
FM1820-1250L	15.0	54	M12	50

## DROP IN ANCHORS



### Description

#### ICCONS DXTM DROP-IN ANCHOR

Suitable to fasten threaded rod and bolts into solid core material

Must use correct FM1820-SET setting tool during installation

Zinc clear, Carbon steel body

Suitable for indoor use

ETA approved and AS5216:2021 compliant

Stainless steel available on request



Fire Rated

Concrete

PART NO	DRILL DIAMETER	DRILL DEPTH	INTERNAL THREAD	CARTON
	mm	mm		QTY
FM1820-0625	8.0	30	M6	100
FM1820-0830	10.0	32	M8	100
FM1820-1040	12.0	42	M10	50
FM1820-1250	15.0	54	M12	50
FM1820-1665	20.0	70	M16	25
FM1820-2080	25.0	85	M20	25



**DROP IN BUCKETS**



**Description**

**ICCONS DLXTM DROP-IN ANCHOR**  
 Suitable to fasten threaded rod and bolts into solid core material  
 Carbon Steel with Zinc clear finish  
 Must use correct FM1820-SET setting tool during installation  
 Suitable for indoor use  
 ETA approved and AS5216:2021 compliant  
 Stainless steel available on request  
 Lipped edge to prevent over embedment and neat finish  
 Comes with 2 Drill Bits + 1 Setting tool



PART NO	DRILL DIAMETER	MIN EMBEDMENT	INTERNAL THREAD	CARTON
	mm	mm		QTY
BUCKET-1030L	12.0	32	M10	1 (500 IN BUCKET)
BUCKET-1040L	12.0	42	M10	1 (500 IN BUCKET)
BUCKET-1250L	15.0	54	M12	1 (200 IN BUCKET)

**DROP IN SETTING TOOL**




**Description**

Heavy duty drop in anchor setting tool  
 Thick large padded area provides safety protection  
 Setting tools are not suitable with all brands of drop in anchors  
 Make sure length of pin meets manufacturers tech data


PART NO	TO SUIT	CARTON
		QTY
FM1820-SET06	M6	1
FM1820-SET08	M8	1
FM1820-SET10	M10	1
FM1820-SET12	M12	1
FM1820-SET16	M16	1
FM1820-SET20	M20	1

**HOLLOW SET DROP IN ANCHORS**



**Description**

Suitable to fasten threaded rod and bolts into hollow core material  
 Suitable for indoor use  
 Tapered expansion sleeve design  
 Serrated expansion cone  
 Requires HSDIM10-TOOL to install



PART NO	DRILL DIAMETER	INTERNAL THREAD	CARTON
	mm		QTY
HSDIM10	16.0	M10	50
HSDIM10-TOOL	-	-	1

## TIMBER ROD HANGERS



### Description

Suitable for vertical and side mounting of threaded rod into timber substrates

Zinc plated finish



Wood

PART NO	MOUNTING	EMBEDMENT	INTERNAL THREAD	HEAD SIZE	CARTON
		mm		mm	
28125	VERTICAL	25	M10	16	100
28044	VERTICAL	50	M10	16	100
28128	SIDE	50	M10	16	100

## STEEL ROD HANGERS



### Description

Suitable for vertical and side mounting of threaded rod into steel substrates 1.0 - 3.0mm thick

Zinc clear finish suitable for indoor use



Steel

PART NO	MOUNTING	DRILLING RANGE	INTERNAL THREAD	HEAD SIZE	CARTON
		mm		mm	
28008	VERTICAL	1 - 3	M10	16	100
28100	SIDE	1 - 3	M10	16	100

## INSTALLATION ACCESSORIES



### Description

Installation accessories to suit standard concrete, steel and timber rod hangers

PART NO	DESCRIPTION	CARTON
		QTY
05866	SDS DRILL BIT 6.0 x 160	1
5866	DRILL BIT SLEEVE	1
7197	M10 SOCKET SUITS CONCRETE ROD HANGER	5
7187	M10 SOCKET SUITS STEEL / TIMBER ROD HANGER	5



**CONCRETE ROD HANGERS - C1**

Description




Bucket includes:  
3 x Socket Drivers  
3 x Drill Bits

**ICCONS SXTB-IM 6MM ROD HANGER**

Suitable for fixing into cracked concrete and uncracked concrete requiring seismic C1 approval

Zinc clear finish suitable for indoor use

ETA approved and AS5216 compliant



PART NO	DRILL DIAMETER	MAX EMBEDMENT	INTERNAL THREAD	HEAD SIZE	CARTON
	mm	mm		mm	QTY
28084-SE	6	40	M10	13	100
28084	6	55	M8 / M10	13	50
28084-BUCKET	6	55	M8 / M10	13	1 (500 IN BUCKET)

**CONCRETE ROD HANGERS - C1**

Description




**ICCONS TSM-IM 6MM ROD HANGER**

Suitable for fixing into cracked and uncracked concrete requiring seismic C1 approval

Zinc clear finish suitable for indoor use


ETA approved and AS5216 compliant



PART NO	DRILL DIAMETER	MAX EMBEDMENT	INTERNAL THREAD	HEAD SIZE	CARTON
	mm	mm		mm	QTY
TOGE-M10	6	55	M8 / M10	13	50
TOGE-M10SE	6	40	M8 / M10	13	50
TOGE-CPLR	M12 COUPLER TO SUIT M10 TOGE				50

**CONCRETE ROD HANGERS - C2**

Description

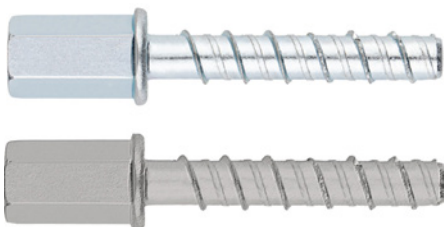


**ICCONS SXTB-IM 8MM ROD HANGER**

Suitable for fixing into cracked concrete and uncracked concrete requiring seismic C2 approval

Zinc clear finish suitable for indoor use  
HDG finish suitable for outdoor use


ETA approved and AS5216 compliant



PART NO	DRILL DIAMETER	MAX EMBEDMENT	INTERNAL THREAD	HEAD SIZE	CARTON
	mm	mm		mm	QTY
28084/C2	8	50	M10	13	100
28084/C2HDG	8	50	M10	13	100
28084-M12/C2	8	50	M12	19	50
28084-M12/C2HDG	8	50	M12	19	50




## CAST IN THREADED ROD HANGER

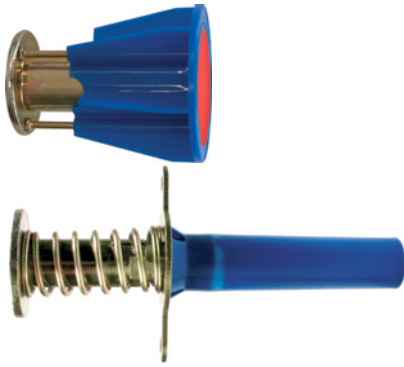

### Description

#### ICCONS BLUE BANGER HANGER

Suitable for pre casting into concrete with a timber or metal deck  
 Thread protected by additional colour locating protective cover  
 Large plastic base for stability and protection of thread  
 Dustless application as no need to drill concrete  
 Suitable for seismic loading backed by  
 ICC Report ESR-3599  
 Dual M10 and M12 threads  
 Granted under AC446



PART NO	SUIT ROD	SUIT DECK	CARTON
			QTY
BB081012-W	M10 / M12	TIMBER	100
BB081012-M	M10 / M12	METAL	100

## CONCRETE SCREW BOLTS ZINC - NON SEISMIC APPROVED



### Description

#### ICCONS SXTB SCREWBOLT

High tensile steel body, Zinc yellow finish  
 Galvanised finish available on request  
 Suitable for internal use  
 Non seismic approved screw bolt  
 ETA Approved and AS5216 compliant



PART NO	DRILL DIAMETER	LENGTH	MAXIMUM FIXTURE	SOCKET SIZE	CARTON
	mm		mm		mm
BT0550	5.0	50	15	8	100
BT1060	10.0	60	5	17	50
BT1075	10.0	75	20	17	50
BT1280	12.0	80	5	19	50
BT12100	12.0	100	25	19	50
BT16100	16.0	100	10	24	15
BT16150	16.0	150	60	24	15




**CONCRETE SCREW BOLTS ZINC - C1**

Description



**ICCONS SXTB SCREWBOLT**  
 High tensile steel body, Zinc yellow finish  
 Galvanised finish available on request  
 Suitable for internal use  
 C1 Approved  
 ETA Approved and AS5216 compliant




PART NO	DRILL DIAMETER	LENGTH	MAXIMUM FIXTURE	SOCKET SIZE	CARTON
	mm		mm		mm
BT0650	6.0	50	10	10	100
BT0675	6.0	75	20	10	100
BT06100	6.0	100	45	10	100

**CONCRETE SCREW BOLTS ZINC - C1/C2**

Description



**ICCONS SXTB SCREWBOLT**  
 High tensile steel body, Zinc yellow finish  
 Galvanised finish available on request  
 Suitable for internal use  
 C1/C2 Approved  
 ETA Approved and AS5216 compliant



PART NO	DRILL DIAMETER	LENGTH	MAXIMUM FIXTURE	SOCKET SIZE	CARTON
	mm		mm		mm
BT0855	8.0	55	5	13	100
BT0860	8.0	60	10	13	100
BT0875	8.0	75	25	13	100
BT08100	8.0	100	35	13	100
BT10100	10.0	100	15	17	50
BT10120	10.0	120	35	17	50
BT12150	12.0	150	45	19	25

## THROUGH BOLTS GALVANISED - NON SEISMIC APPROVED



### Description

**ICCONS TB THRU-BOLT PRO**  
Carbon steel body, Galvanised finish  
Suitable for external use



Concrete


PART NO	DRILL DIAMETER	MIN EMBEDMENT	MAXIMUM FIXTURE	CARTON
	mm	mm	mm	QTY
TB10065G	10.0	45	10	25
TB12080G	12.0	60	5	25
TB16105G	16.0	80	5	25
TB20125G	20.0	100	5	10

## THROUGH BOLTS GALVANISED - C1



### Description

**ICCONS TB THRU-BOLT PRO**  
Carbon steel body, Galvanised finish  
Suitable for external use  
C1 Approved  
C2 Rating available of request, size dependant



PART NO	DRILL DIAMETER	MIN EMBEDMENT	MAXIMUM FIXTURE	CARTON
	mm	mm	mm	QTY
TB08080G	8.0	55	14	50
TB08100G	8.0	55	34	50
TB10090G	10.0	68	10	25
TB10120G	10.0	68	40	25
TB12100G	12.0	80	4	25
TB12140G	12.0	80	44	25
TB16125G	16.0	97	8	25
TB16140G	16.0	97	23	25
TB16190G	16.0	97	73	25
TB20160G	20.0	114	22	10
TB20200G	20.0	114	62	10

## THROUGH BOLTS ZINC - NON SEISMIC APPROVED



### Description

**ICCONS TB THRU-BOLT PRO**  
Carbon steel body, Zinc clear finish  
Suitable for internal use



Concrete

PART NO	DRILL DIAMETER	MIN EMBEDMENT	MAXIMUM FIXTURE	CARTON
	mm	mm	mm	QTY
TB06085	6.0	50	26	100
TB06120	6.0	50	61	50
TB10065	10.0	45	10	25
TB12080	12.0	60	5	25
TB16105	16.0	80	5	25
TB20125	20.0	100	5	10


**THROUGH BOLTS ZINC - C1****Description****ICCONS TB THRU-BOLT PRO**

Carbon steel body, Zinc clear finish

Suitable for internal use

C1 Approved

C2 Rating available of request, size dependant



PART NO	DRILL DIAMETER	MIN EMBEDMENT	MAXIMUM FIXTURE	CARTON
	mm	mm	mm	QTY
TB08080	8.0	55	14	50
TB08100	8.0	55	34	50
TB10090	10.0	68	10	25
TB10120	10.0	68	40	25
TB12100	12.0	60	4	25
TB12140	12.0	80	44	25
TB12180	12.0	80	84	25
TB16125	16.0	97	8	25
TB16140	16.0	97	23	25
TB16190	16.0	97	73	25
TB20160	20.0	114	22	10
TB20200	20.0	114	62	10

**THROUGH BOLT SEISMIC - C2****Description****ICCONS FM753 CRACK THRU-BOLT**


Suitable for fixing into cracked and uncracked concrete requiring seismic C2 approval

Corrosion Resistant 3DG finish

Suitable for indoor and outdoor use

ETA approved and AS5216 compliant

Stainless steel available on request



PART NO	DRILL DIAMETER	SIZE	LENGTH	MIN EMBEDMENT	MAX FIXTURE	CARTON
	mm		mm	mm	mm	QTY
TB10090/C2	10	M10	90	67	10	50
TB12110/C2	12	M12	110	81	10	50
TB16130/C2	16	M16	130	97	10	20

## HEX SLEEVE ANCHORS GALVANISED



### Description

Carbon steel body, Galvanised finish

Suitable for internal and external use

Collapsible body designed to expand when tightened



Concrete

PART NO	DRILL DIAMETER	MIN EMBEDMENT	MAXIMUM FIXTURE	CARTON
	mm	mm	mm	QTY
HS0840G	8.0	35	5	100
HS0865G	8.0	35	30	50
HS0885G	8.0	35	50	50
HS1040G	10.0	34	6	50
HS1050G	10.0	40	10	50
HS1060G	10.0	40	20	50
HS1075G	10.0	40	35	50
HS1095G	10.0	40	55	50
HS1260G	12.0	50	10	50
HS1275G	12.0	50	25	25
HS12100G	12.0	50	50	25
HS12130G	12.0	50	80	25
HS1665G	16.0	55	10	25
HS16110G	16.0	55	55	10



## HEX SLEEVE ANCHORS ZINC



### Description

Carbon steel body, Zinc yellow finish

Suitable for internal use

Collapsible body designed to expand when tightened



Concrete

PART NO	DRILL DIAMETER	MIN EMBEDMENT	MAXIMUM FIXTURE	CARTON
	mm	mm	mm	QTY
HS6525	6.5	20	5	100
HS6535	6.5	30	5	100
HS6555	6.5	30	25	100
HS6575	6.5	30	45	100
HS0840	8.0	35	5	100
HS0865	8.0	35	30	50
HS0885	8.0	35	50	50
HS1040	10.0	34	6	50
HS1050	10.0	40	10	50
HS1060	10.0	40	20	50
HS1075	10.0	40	35	50
HS1095	10.0	40	55	50
HS10120	10.0	40	80	50
HS1260	12.0	50	10	50
HS1275	12.0	50	25	25
HS12100	12.0	50	50	25
HS12130	12.0	50	80	25
HS1665	16.0	55	10	25
HS16110	16.0	55	55	10
HS16145	16.0	55	90	10
HS2075	20.0	60	15	10
HS20105	20.0	60	45	10
HS20150	20.0	60	90	10

**GRABCON®**



Description

**ICCONS GCHX MASONRY SCREW**

Concrete screw suitable for light duty applications  
 Mechanical Galvanised finish, Carbon steel body  
 Suitable for fixing into concrete resulting in a plug free finish



Concrete

PART NO	DRILL DIAMETER	SCREW DIAMETER	LENGTH	DRILL DEPTH	HEAD	CARTON
	INCH	mm	mm	mm		QTY
2720	3/16	6.5	32	25	5/16"	100
2722	3/16	6.5	45	25		100
2724	3/16	6.5	58	25		100
2726	3/16	6.5	70	25		100
2728	3/16	6.5	83	25		100
2732	3/16	6.5	100	25		100

**TIE WIRE CEILING HANGERS**



Description

Ceiling hanger suitable for light duty applications  
 Zinc clear, Carbon steel body



Concrete

PART NO	DRILL DIAMETER	EYELET	MIN EMBEDMENT	CARTON
	mm	mm	mm	QTY
TW3700	5.0	5.5	30	100
TW3759	6.5	7	25	100

**TIE WIRE THROUGH BOLTS**



Description

Tie wire through bolts are a one piece expansion anchor used in applications such as suspending ceilings, attaching cable ties, support wires and ducting systems



Concrete

PART NO	DRILL DIAMETER	EYELET	MIN EMBEDMENT	CARTON
	mm	mm	mm	QTY
TWTB06090	6.0	6	40	100
TWTB06120	6.0	6	40	50
TWTB06150	6.0	6	40	100

**EYE BOLT SLEEVE ANCHORS ZINC**



Description

Carbon steel body, Zinc yellow finish  
 Suitable for internal use  
 Collapsible body designed to expand when tightened  
 Features 8mm eyelet for applications requiring a tie point



Concrete

PART NO	DRILL DIAMETER	MIN EMBEDMENT	EYELET	CARTON
	mm	mm	mm	QTY
EB0845	8.0	45	8	100




## POWDER ACTUATED TOOL




### Description

Light weight powder actuated nail tool  
 Suitable up to 75mm nails  
 Accepts .27 caliber charge strips  
 Single shot, 2 stage trigger for safety  
 Easy adjustable power dial



PART NO	CHARGE CALIBER	CARTON
		QTY
PA3500EX	.27	1

## POWDER ACTUATED CHARGES

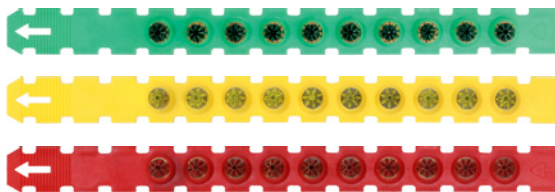


### Description

Suitable to be fired using the PA3500EX powder actuated tool  
 10 Continuous charges per strip  
 Available in 3 different charge strengths

PART NO	CALIBER	CHARGE STRENGTH	COLOUR	CARTON
				QTY
50622	.27	LOW	GREEN	100
50626	.27	MEDIUM	YELLOW	100
50630	.27	HIGH	RED	100




## POWDER ACTUATED WASHERED PINS



### Description

Suitable to be fired using the PA3500EX powder actuated tool

Comes as standard with 22mm metal washer



PART NO	LENGTH	HEAD DIAMETER	SHANK DIAMETER	CARTON
	mm	mm	mm	QTY
DP820W	20	8.0	3.70	100
DP825W	25	8.0	3.70	100
DP830W	30	8.0	3.70	100


## POWDER ACTUATED PINS



### Description

Suitable to be fired using the PA3500EX powder actuated tool

Single nail, not collated



PART NO	LENGTH	LENGTH	HEAD DIAMETER	SHANK DIAMETER	CARTON
	mm	INCH	mm	mm	QTY
50022	19	3/4	8.0	3.70	100
50026	25	1	8.0	3.70	100
50032	32	1 1/4	8.0	3.70	100
50034	38	1 1/2	8.0	3.70	100
50036	45	1 3/4	8.0	3.70	100
50038	50	2	8.0	3.70	100
50040	57	2 1/4	8.0	3.70	100
50042	60	2 3/8	8.0	3.70	100
50044	65	2 1/2	8.0	3.70	100
50046	70	2 3/4	8.0	3.70	100
50048	75	3	8.0	3.70	100
50050	100	3 7/8	8.0	3.70	100




**POWDER ACTUATED ANGLE CLIPS**



**Description**


Suitable to be fired using the PA3500EX powder actuated tool

Comes as standard 45 degree bracket



PART NO	LENGTH	HEAD DIAMETER	SHANK DIAMETER	CARTON
	mm	mm	mm	QTY
50368	25	8.0	3.70	100


**POWDER ACTUATED THREADED ROD HANGERS**



**Description**

Suitable to be fired using the PA3500EX powder actuated tool

Comes as standard single shot M10 thread



PART NO	LENGTH	INTERNAL THREAD	HEAD DIAMETER	SHANK DIAMETER	CARTON
	mm		mm	mm	QTY
50234	25	M10	8.0	3.70	100

**POWDER ACTUATED CABLE TIES**




**Description**

Suitable to be fired using the PA3500EX powder actuated tool

Comes as standard with 240mm nylon cable tie

Range being discontinued, available whilst stock lasts



PART NO	LENGTH	CABLE TIE	HEAD DIAMETER	SHANK DIAMETER	CARTON
	mm	mm	mm	mm	QTY
50390	32	240	8.0	3.70	500

## GAS POWERED TOOL & ACCESSORIES



### Description

Suitable for forced entry of nails and accessories into concrete material

A lightweight and small tool for ease of use

Suitable up to 35mm nails

Comes standard with a short track magazine

PART NO	DESCRIPTIONS	SUIT TOOL	CARTON
			QTY
65306	GAS TOOL	C5	1
55010	GAS FUEL CELL	C3	1
55301	GAS FUEL CELL	C5	1
65347	ADJUSTABLE POLE TOOL EXTENSION	C5	1
55583	BATTERY	C5/C3	1
55618	CHARGING BASE	C5/C3	1
55620	CHARGING CABLE	C5/C3	1
56247	BELT HOOK REPLACEMENT	C5/C3	1

## GAS POWERED HARD CONCRETE PINS




### Description

Suitable to fix by forced entry into most concrete substrates

Hard Concrete suitable by a strengthened shank and ballistic point

Comes complete with 1 gas can per box




Concrete

PART NO	LENGTH	SUIT TOOL	CARTON
	mm		QTY
55017HC	17	C3	1 (1000 IN BOX)
55022HC	22	C3	1 (1000 IN BOX)
55317HC	17	C5	1 (800 IN BOX)
55322HC	22	C5	1 (800 IN BOX)




## GAS POWERED CABLE TIE MOUNTS

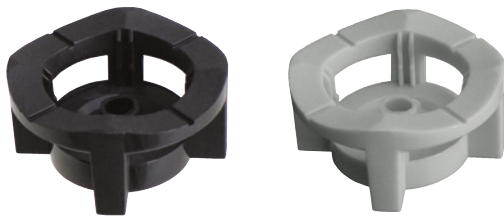

### Description

Suitable to be fixed in place with Gas Powered hard concrete pins

Perfect for use with cable ties to for light duty applications with multiple tie points



PART NO	SUIT TOOL	CARTON
		QTY
55075	C3	100
55074	C3 & C5	100

## GAS POWERED ROD HANGERS




### Description

Suitable to be fixed in place with Gas Powered hard concrete pins

Suitable to fix M10 threaded rod in light duty applications

Allows for a fast installation by no drilling of concrete

Range being discontinued, available whilst stock lasts



PART NO	THREAD	SUIT TOOL	CARTON
			QTY
55335	M10	C3 & C5	100


## GAS POWERED ANGLE CLIPS



### Description

Suitable to be fixed in place with Gas Powered hard concrete pins

90 degree angle bracket for light duty applications



PART NO	SUIT TOOL	CARTON
		QTY
55077	C3 & C5	100

## GAS POWERED SELF LOCKING CLIPS



### Description

Can be shot directly into the concrete, or be utilised in Metal and Nylon channels  
 For fast and neat installation of Cold and Warm Water pipes (up to 90°C)  
 Suitable to be fixed in place with Gas Powered hard concrete pins  
 Multi diameter to suit a range of pipe sizes  
 Self locking poly pipe clamp



Concrete

PART NO	PIPE DIAMETER	SUIT TOOL	SELF LOCKING	CARTON
	mm			QTY
55402	14 - 18	C3 & C5	YES	100
55404	20 - 25	C3 & C5	YES	50
55406	26 - 32	C3 & C5	YES	50
55408	35 - 42	C3 & C5	YES	25

## GAS POWERED WASHERS



### Description

Suitable to be fixed in place with Gas Powered hard concrete pins  
 For use with nylon and metal strapping for light duty applications



Concrete

PART NO	TYPE	DIAMETER	SUIT TOOL	CARTON
		mm		QTY
55062	STRAP	14	C3 & C5	100
55040	LATHING	25	C3 & C5	100

## GAS POWERED CONDUIT CLIPS



### Description

Suitable to be fixed in place with Gas Powered hard concrete pins  
 Half saddles utilised for PVC and Conduit tube



Concrete

PART NO	SUIT	CARTON
	mm	
55340	16	100
55350	20	100
55360	25	100



## DEWALT® CONCRETE NAILER KIT



### Description

Electric concrete nailer eliminates the need for gas canisters

Kit Includes:  
DCN890 concrete nailer,  
Two 5.0Ah XR Li-Ion batteries and charger,  
DCN8903 and DCN8904 nose pieces.

Tools skin only available to order on request

PART NO	SUIT FASTENERS	WEIGHT	MAGAZINE CAPACITY	CARTON
	mm			kg
DCN890P2-XE	13 - 57	4.2	30	1

## DEWALT® HARD CONCRETE PINS



### Description

Extra hard concrete pins to suit DeWalt® electric concrete nailer only

PART NO	LENGTH	DIAMETER	HEAD DIAMETER	CARTON
	mm			mm
DCN8903022	22	3	6.3	1 (1000 IN BOX)

## DEWALT® CONCRETE NAILER ACCESSORIES



### Description

Range of accessories to suit DeWalt® electric concrete nailer only

PART NO	DESCRIPTION	CARTON
		QTY
DCN8905-XJ	EXTENSION POLE TOOL	1
DCN8902-XJ	MAGNETIC NOSE PIECE	1
DCN8903-XJ	NON-MAGNETIC NOSE PIECE	1
DCN8904-XJ	DRYWALL NOSE PIECE	1

## HANGING STRAPS



### Description

Hanging straps used to support flexible duct  
 Can be used with Duct Saddle to meet AS4254.2 2012 requirement  
 Very high tensile strength

PART NO	WIDTH	LENGTH	CARTON
	mm	M	QTY
BLUE-STRAP	25	50	48
BLUE-STRAP75	75	50	16

## DUCT SADDLE




### Description

Load distribution for flexible duct meeting AS4254.2 2012 requirements  
 Semi Rigid and Fire Resistant  
 Low Flammability as per AS1530.2  
 Item being discontinued, available whilst stock lasts

PART NO	WIDTH	LENGTH	CARTON
	mm	M	QTY
DUCTSADDLE	75	20	16



**DUCT FOAMS**

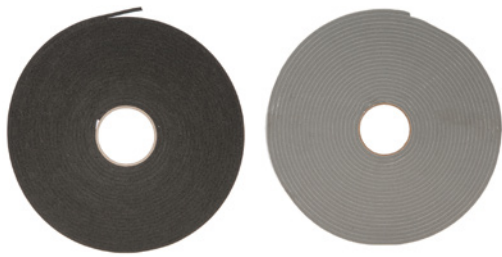

Description

Duct foam is used to seal between two rigid duct flanges

Black rolls come “linerless” to minimize waste on site

PART NO	WIDTH	THICKNESS	LENGTH	CARTON
	mm	mm	M	QTY
DUCTFOAM-G12	12	6.4	15.2	36
DUCTFOAM-G18	18	6.4	15.2	24
DUCTFOAM-B12	12	5.0	15.0	30
DUCTFOAM-B15	15	5.0	15.0	24
DUCTFOAM-B18	18	5.0	15.0	20
DUCTFOAM-B35	35	5.0	15.0	10

**DUCT CLEATS**



Description

Metal J Cleats for joining duct frames

Available in Long and Short Legs

PART NO	DESCRIPTION	CARTON
		QTY
DUCTCLEAT-SHORT	J CLEAT SHORT LEG	250
DUCTCLEAT-LONG	J CLEAT LONG LEG	250
DUCT-TOOL	J CLEAT INSTALLATION TOOL	1



## DUCT QUICK SCREW



### Description

Replaces traditional cup head bolt & nut application to fasten duct

Must use duct corners that are compatible

PART NO	DIAMETER	TPI	LENGTH	SOCKET SIZE	CARTON
	mm		mm	mm	QTY
QUICKSCREW	10.5	9	25	13	500

## DUCT WRAPS



### Description

Blue adhesive wrap

Self adhesive PE Film

Protects unfinished duct work from dust, insects, moisture and debris

Seals the ends of ductwork for transportation

PART NO	LENGTH	CARTON
	mm	QTY
DUCTWRAP-600	600	4
DUCTWRAP-900	900	4
DUCTWRAP-1200	1200	4
DUCTWRAP-1500	1500	4



**REGISTER SPRINGS**



**Description**

Unplated light duty springs for registers  
 Securing grilles and registers in place

PART NO	COIL LENGTH	COIL WIDTH	OVERALL LENGTH	FINISH	CARTON
	mm	mm	mm		QTY
SPRING-10X75	10	75	122	UNPLATED	100
SPRING-10X75HD	10	75	117	ZINC PLATED	100
SPRING-20X35	20	35	120	UNPLATED	100

**FIRE DAMPER WRAPS**



**Description**

Fire damper perimeter packing  
 Rock wool insulation encapsulated inside malleable aluminium foil  
 Meets AS1682.2 requirements  
 Tested in accordance with AS1530 part 3 0,0,0,0

PART NO	WIDTH	THICKNESS	LENGTH	CARTON
	mm	mm	M	QTY
FDW075	75	19	3.6	5
FDW100	100	19	3.6	5
FDW150	150	19	3.6	5
FDW200	200	19	3.6	5
FDW250	250	19	3.6	5

## FOIL TAPES



### Description

Available woven in plain and reinforced materials

Australian made

Synthetic rubber/resin adhesive for best performance

Tearable for ease of use

Meets AS4254.2 2012 requirement (reinforced variety)

Tested to AS1530.3 0,0,0,0-1

PART NO	FOIL	COLOUR	THICKNESS	LENGTH	CARTON
			mm	M	QTY
FOILTAPE-48	PLAIN	SILVER	48	45	24
FOILTAPE-72	PLAIN	SILVER	72	45	16
FOILTAPE-48R	REINFORCED	SILVER	48	50	24
FOILTAPE-72R	REINFORCED	SILVER	72	50	16
FOILTAPE-96R	REINFORCED	SILVER	96	50	12

## DUCT TAPES



### Description

Excellent conformability with irregular surfaces

Lead free PVC film constructions

Colour fast and will not become brittle over time

PART NO	COLOUR	WIDTH	LENGTH	CARTON
		mm	M	QTY
DUCTTAPE-BLK	BLACK	48	30	64
DUCTTAPE-GRY	GREY	48	30	64
DUCTTAPE-WHT	WHITE	48	30	64



## ELECTRICAL TAPES



### Description

General purpose PVC electrical tape

Other colours available on request

PART NO	COLOUR	CARTON
		QTY
ETAPE-BLUE	BLUE	10
ETAPE-WHT	WHITE	10
ETAPE-RED	RED	10
ETAPE-BLK	BLACK	10
ETAPE-EARTH	EARTH	10

## BARRIER/HAZARD TAPES



### Description

Hazard tapes are one side adhesive to stick to flooring and pipe/duct work

Barrier tapes are non adhesive to provide barrier indication

PART NO	WIDTH	LENGTH	CARTON
	mm	M	QTY
HAZARD-YB	48	33	24
BARRIER-YB	75	100	20
BARRIER-RW	75	100	20

## CAST-IN COLLARS



### Description


PROMASEAL® CIH Collar is designed to be fixed to formwork prior to the pouring of concrete floor slabs. It has been tested with various uPVC and HDPE pipes.

CIH 65: for pipes up to nominal 65mm  
 CIH 100: for pipes between nominal 40 & 100mm  
 CIH 150: for nominal 150mm

Technical documentation available on request

PART NO	PIPE DIAMETER	CARTON
	NB	QTY
CIH65	<65	16
CIH100	40 - 100	9
CIH150	150	5
250C	250	1
315C	300	1

## LOW CAST-IN COLLARS



### Description


PROMASEAL® CIL Low Cast In Collar is designed to be fixed to formwork prior to the pouring of concrete floor slabs. The collar accommodates the uPVC pipe fitting within the thickness of the slab enabling space saving.

PROMASEAL® CIL Low Cast In Collar are not suitable to protect floor waste penetrations. For protecting floor waste penetrations please refer to PROMASEAL® Floor Waste Cast-in Collars.

Technical documentation available on request

PART NO	PIPE DIAMETER	CARTON
	NB	QTY
CIL40	40	10
CIL50	50	10
CIL65	65	10
CIL80	80	10
CIL100	100	10

## FLOOR WASTE COLLARS

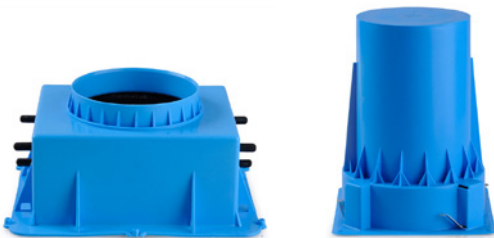

### Description

Floor waste collars help prevent the passage of fire and smoke through openings in compartment floors in the event of a fire. For installation of collars on permanent formwork and in thin floor slabs (<150mm) always contact Promat. These collars are available in various models and the type used depends on the certification required for the building.

The FWC100 collar is suitable for 50, 80 & 100mm uPVC, 100mm HDPE and 100mm Rehau Raupiano pipe.

Technical documentation available on request

PART NO	PIPE DIAMETER	CARTON
	NB	QTY
FWC100	50, 80, 100	10
FWCH100	50, 80, 100	6



## RETROFIT COLLARS FLANGED



### Description

Square based PROMASEAL® - FC Retrofit Collar is multi purpose collar designed for use with concrete slabs, masonry and lightweight walls and lined ceilings

The split type collar can be retrofitted where necessary  
It is available in a range of sizes to suit plastic pipes up to 315mm outside diameter

Note that PROMASEAL® -FC Retrofit Collars above 150mm have a circular base

Technical documentation available on request

PART NO	PIPE DIAMETER	TYPE	CARTON
	NB		QTY
FC40	40	FLANGED	20
FC50	50	FLANGED	20
FC65	65	FLANGED	15
FC80	80	FLANGED	20
FC100	100	FLANGED	10
FC150	150	FLANGED	5
FC250	250	FLANGED	1
FC300	300	FLANGED	2

## RETROFIT COLLARS SOCKET



### Description

Circular based PROMASEAL® Retrofit Collar (FCS type) is designed to be fitted around installed pipes that pass through floor slabs and have been tested with uPVC, HDPE and ABS pipes up to 100mm diameter. The larger opening within the collars will accommodate pipes (and uPVC pipe fittings) that have differing outside diameters. The split type collar can be retrofitted where necessary. It is available in a range of sizes to suit plastic pipes up to 110mm outside diameter.

Technical documentation available on request

PART NO	PIPE DIAMETER	TYPE	CARTON
	NB		QTY
FCS40	40	SOCKET	20
FCS50	50	SOCKET	15
FCS65	65	SOCKET	15
FCS100	100	SOCKET	10

## RETROFIT FLOOR WASTE COLLAR



### Description

PROMASEAL® Retrofit Floor Waste Collar is designed to provide fire resistance where floor wastes penetrate wet areas.

PROMASEAL® Retrofit Floor Waste Collar is surface mounted (retrofit) type that provides integrity and insulation criteria for uPVC floor waste traps of 50mm, 80mm and 100mm diameters. For installation of PROMASEAL® Retrofit Floor Waste Collar on permanent form work and in thin floor slabs, please consult Promat.

Technical documentation available on request

PART NO	PIPE DIAMETER	CARTON
	NB	QTY
FWR100	50, 80, 100	7

## ALLPROOF FIRE COLLARS



### Description

The Allproof low profile collars have been designed to and tested on a wide range of plastic plumbing pipes, AC services, and electric services through concrete walls/floors, Composite floors and plasterboard walls. The low profile collars consist of intumescent strip(s) encased in a galvanised or Stainless steel casing with fixing tabs. The advanced intumescent technology allows the Allproof fire collar to achieve a height of only 27mm for the 25-80mm.

PART NO	PIPE DIAMETER	CARTON
	NB	QTY
APFC25	25	190
APFC40	40	100
APFC50	50	60
APFC65	65	50
APFC80	80	40
APFC100	100	60
APFC150	150	20

## UNICOLLAR®



### Description

PROMASTOP® UniCollar® is an intumescent device designed to maintain the integrity of the fire resistant elements through which various plastic pipes pass. It is suitable for retrofit installation in various floors and walls similar to that in which it has been tested. In the event of a fire, the intumescent material in the PROMASTOP® UniCollar® rapidly expands, closing off the plastic pipe or combustible insulation and forming an insulating barrier.

PROMASTOP® UniCollar® is packed in individual boxes each containing 2250mm length of collar (or 150 segments) and fixing accessories are included. The collar is designed so that it can be cut and snapped in modules of 15mm.

Technical documentation available on request

PART NO	LENGTH	CARTON
	mm	QTY
UC	2250	8

## CONDUIT COLLARS



### Description

Conduit Collar is designed for retrofitting around small (<32mm) plastic conduit pipes that pass through fire floor or wall slabs. It comes in one size (32mm) and can be used on smaller diameter conduits without modification. The collar is fixed to the floors/walls with two brackets.


Insulation criteria will vary depending on types of the plastic pipes and the penetrating building element through which the collar passes.

Technical documentation available on request

PART NO	PIPE DIAMETER	CARTON
	mm	QTY
CFC32	<32	10



## WALL COLLARS



### Description

PROMASEAL® Wall Collar is designed for insertion into fire resistant wall elements such as plasterboard, concrete, masonry and has been tested on uPVC and HDPE pipes.

Similar to the PROMASEAL® Retrofit Collar, this is a split type collar to allow installation to existing pipework.

Technical documentation available on request

PART NO	PIPE DIAMETER	CARTON
	NB	QTY
FCW40	40	20
FCW50	50	12
FCW65	65	20
FCW100	100	10
FCW150	150	4

## SUPAWRAP 40



### Description

PROMASEAL® SupaWrap is designed to provide insulation criteria onto metal pipes, cables and cable trays.


Clause C3.15 of the Building Code of Australia requires copper pipes and other service penetrations to be able to achieve the same insulation criteria as the element they are passing through when tested to the requirements of AS 1530.4:2014.

Technical documentation available on request

PART NO	SIZE	CARTON
	mm	QTY
PSW	600 x 4000	1



## ACOUSTIC LAGGING

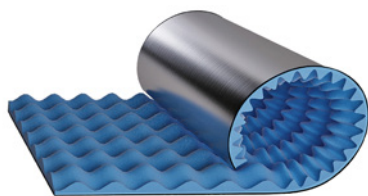

### Description

High-performance composite acoustic wrap to reduce noise from pipes, valves, fan housings and ductwork

Foil facing provides a fire-resistant covering and a surface to join adjacent sheets

PART NO	THICKNESS	WIDTH	LENGTH	WEIGHT	CARTON
	mm	mm	M	kg/m <sup>2</sup>	QTY
THERM25C	25	1350	3	5	1

## PENETRATION SEAL STICKER



### Description

The stickers are designed in accordance with AS4072.1 - Appendix B and can assist in compliance to the baseline data requirements of AS1851

PART NO	CARTON
	QTY
PPSS	1

## FIRE PILLOWS



### Description

PROMASEAL® Pillows are manufactured from treated cloth filled with a high density, granulated fire seal material. When exposed to fire, the pillows remain in place, thus forming a fire barrier of a solid mass of insulating material.

Between 100 and 130 are usually required per m<sup>2</sup> of an open area; however, the pillows can be easily placed in many openings where it would be difficult to apply other products or wet systems.


In the case of smaller penetrations, it is often more economical to use the pillows, especially if labour costs are a concern, because the required fire performance can be achieved with the application of just a few pillows.

Technical documentation available on request

PART NO	LENGTH	WIDTH	CARTON
	mm	mm	QTY
PILLOW-SML	100	250	30
PILLOW-MED	200	250	20
PILLOW-LGE	300	250	15



## WIRE



### Description

Spools of wire to suit various capacities

Refer to locking device below for corresponding locks

PART NO	LENGTH	FINISH	CARTON
	M		QTY
ZIP-S100	100	GALVANISED	1
ZIP-S500	500	GALVANISED	1
ZIP-Y100	100	GALVANISED	1
ZIP-P100	100	GALVANISED	1
ZIP-S100/SS	100	STAINLESS STEEL	1
ZIP-Y100/SS	100	STAINLESS STEEL	1
ZIP-P100/SS	100	STAINLESS STEEL	1

## LOCKING DEVICE



### Description

Locking mechanism with varied working loads based on wire rope and application

Locking device to suit the S, Y, or P system

Key free release system for easy adjustments

PART NO	TYPE	SAFE WORKING LOAD	CARTON
		kg	QTY
ZIP-KL100	S	50	10
ZIP-KL150	Y	120	10
ZIP-KL200	P	300	10

## STRUT-LOCK



### Description

Strut lock is used in vertical drop applications where single & multiple trapeze installations are required

PART NO	SAFE WORKING LOAD	CARTON
	kg	QTY
ZIP-TPDM820	45	10

## CON-LOCK




### Description

Hammer in anchor suspension system for concrete ceilings

Consists of wire rope, locking device and end fixing

ETA Approved fixing

No claw back required on installations



PART NO	LENGTH	DRILL SIZE	DRILL DEPTH	SAFE WORKING LOAD	CARTON
	M	mm	mm	kg	QTY
ZIPCLS01	1	6	35	50	10
ZIPCLS02	2	6	35	50	10
ZIPCLS03	3	6	35	50	10
ZIPCLS05	5	6	35	50	10
ZIPCLS10	10	6	35	50	10
ZIPCLY01	1	6	35	70	10
ZIPCLY02	2	6	35	70	10
ZIPCLY03	3	6	35	70	10
ZIPCLY05	5	6	35	70	10
ZIPCLY10	10	6	35	70	5


## SHOT-LOCK



### Description

Shot fired suspension system to be used in conjunction with a powder actuated gun and can be fired directly into concrete

Consists of wire rope, locking device and end fixing



PART NO	LENGTH	SAFE WORKING LOAD	CARTON
	M	kg	QTY
ZIPSLPS01	1	25	10
ZIPSLPS02	2	25	10
ZIPSLPS03	3	25	10
ZIPSLPS05	5	25	10
ZIPSLPS10	10	25	10



## UNI-LOCK



### Description

90° angle bracket suspension system

Consists of wire rope, locking device and end fixing

PART NO	LENGTH	SAFE WORKING LOAD	CARTON
	M	kg	QTY
ZIPULS01	1	50	10
ZIPULS02	2	50	10
ZIPULS03	3	50	10
ZIPULS05	5	50	10
ZIPULS10	10	50	10

## KNOCK-IT



### Description

Vertical clip to fix to 1 - 5mm thick flange purlins

Consists of wire rope, locking device and end fixing

Ensure loadings are within purlin manufacturing guidelines

PART NO	LENGTH	PURLIN THICKNESS	SAFE WORKING LOAD	CARTON
	M	mm	kg	QTY
ZIPVLS01	1	1 - 5	35	10
ZIPVLS02	2	1 - 5	35	10
ZIPVLS03	3	1 - 5	35	10
ZIPVLS05	5	1 - 5	35	10
ZIPVLS10	10	1 - 5	35	10

## LOCK



### Description

Eyelet suspension system for wrap around applications

Consists of wire rope, locking device and end fixing

Eyelet allows for minimal friction preventing wire on wire rubbing

PART NO	LENGTH	SAFE WORKING LOAD	CARTON
	M	kg	QTY
ZIPZLS01	1	50	10
ZIPZLS02	2	50	10
ZIPZLS03	3	50	10
ZIPZLS05	5	50	10
ZIPZLS10	10	50	10
ZIPZLY01	1	90	10
ZIPZLY02	2	90	10
ZIPZLY03	3	90	10
ZIPZLY05	5	90	5
ZIPZLY10	10	90	5

## DEC-LOCK



### Description

25mm wedge nut suspension system for structural steel decking style ceilings

Consists of wire rope, locking device and end fixing



Steel Deck

PART NO	LENGTH	SAFE WORKING LOAD	CARTON
	M	kg	QTY
ZIPDLS01	1	50	10
ZIPDLS02	2	50	10
ZIPDLS03	3	50	10
ZIPDLS05	5	50	10
ZIPDLS10	10	50	10



## SNAP-IT



### Description

Carabiner attached suspension system

Carabiner allows for easy attachment and removal if required

Consists of wire rope, locking device and end fixing

PART NO	LENGTH	SAFE WORKING LOAD	CARTON
	M	kg	QTY
ZIPPSEK01S	1	45	10
ZIPPSEK02S	2	45	10
ZIPPSEK03S	3	45	10
ZIPPSEK05S	5	45	10
ZIPPSEK10S	10	45	10
ZIPPSEK01Y	1	90	10
ZIPPSEK02Y	2	90	10
ZIPPSEK03Y	3	90	10
ZIPPSEK05Y	5	90	5
ZIPPSEK10Y	10	90	5

## GRIP-IT



### Description

To be used in conjunction with horizontal catenary wire

Provides vertical drop away point along a horizontal wire

Consists of wire rope, locking device and end fixing

PART NO	LENGTH	SIZE	SAFE WORKING LOAD	CARTON
	M		kg	QTY
ZIPGLS01	1	M6	35	10
ZIPGLS02	2	M6	35	10
ZIPGLS03	3	M6	35	10
ZIPGLS05	5	M6	35	10
ZIPGLS10	10	M6	35	10

## THREAD-IT



### Description

Thread attachment suspension system with a M6 or M8 thread

Consists of wire rope, locking device and end fixing

PART NO	LENGTH	SIZE	SAFE WORKING LOAD	CARTON
	M		kg	QTY
ZIPPLTRK01S	1	M6 x 45	50	10
ZIPPLTRK02S	2	M6 x 45	50	10
ZIPPLTRK03S	3	M6 x 45	50	10
ZIPPLTRK05S	5	M6 x 45	50	10
ZIPPLTRK10S	10	M6 x 45	50	10
ZIPPLTRK01Y	1	M8 x 25	90	10
ZIPPLTRK02Y	2	M8 x 25	90	10
ZIPPLTRK03Y	3	M8 x 25	90	10
ZIPPLTRK05Y	5	M8 x 25	90	5
ZIPPLTRK10Y	10	M8 x 25	90	5

## TOGGLE-IT



### Description

Toggle suspension attachment suitable for holes no greater than 12mm

Consists of wire rope, locking device and end fixing

PART NO	LENGTH	SAFE WORKING LOAD	CARTON
	M		kg
ZIPPTE01SK	1	35	10
ZIPPTE02SK	2	35	10
ZIPPTE03SK	3	35	10
ZIPPTE05SK	5	35	10
ZIPPTE10SK	10	35	10
ZIPPTE01YK	1	90	10
ZIPPTE02YK	2	90	10
ZIPPTE03YK	3	90	10
ZIPPTE05YK	5	90	5
ZIPPTE10YK	10	90	5



## Y-IT SNAP



### Description

- Suspension system with 2 x carabiners attached
- Carabiners allows for easy attachment and removal
- Comes with a predetermined length of wire
- Consists of wire rope, locking device and end fixing

PART NO	LENGTH	WIDTH CONNECTION	SAFE WORKING LOAD	CARTON
	M	mm	kg	QTY
ZIPYTR01S/300	1	300	50	10
ZIPYTR01S/460	1	460	50	10
ZIPYTR02S/300	2	300	50	10
ZIPYTR02S/460	2	460	50	10
ZIPYTR03S/300	3	300	50	10
ZIPYTR03S/460	3	460	50	10

## Y-IT TOGGLE



### Description

- Suspension system with 2 x toggle attachments
- Comes with a predetermined length of wire
- Consists of wire rope, locking device and end fixing

PART NO	LENGTH	WIDTH CONNECTION	SAFE WORKING LOAD	CARTON
	M	mm	kg	QTY
ZIPYLM01S/300	1	300	35	10
ZIPYLM01S/460	1	460	35	10
ZIPYLM02S/300	2	300	35	10
ZIPYLM02S/460	2	460	35	10
ZIPYLM03S/300	3	300	35	10
ZIPYLM03S/460	3	460	35	10



## LUMA-LOCK



### Description

Toggle suspension attachment to connect light boxes and cable tray predominantly

Ensure holes are no larger than 12mm

Self leveling, one fixing point per drop

PART NO	WIDTHS	SAFE WORKING LOAD	CARTON
	mm	kg	QTY
ZIPLUM50-200	50 - 200	35	10
ZIPLUM300-400	300 - 400	35	10

## TRY-LOCK



### Description

Carabiner attached suspension systems to connect to cable basket predominantly

Self leveling, one fixing point per drop

PART NO	WIDTHS	SAFE WORKING LOAD	CARTON
	mm	kg	QTY
ZIPTRS50-200	50 - 200	50	10
ZIPTRS300-400	300 - 400	50	10

## WIRE CUTTER



### Description

Heavy duty wire rope cutters, cuts cleanly and limits wire fray ends

PART NO	WIDTHS	CARTON
		QTY
ZIP-CUTTER	S & Y	1
ZIP-CUTTER3	P	1



## TENSIONER GUN



### Description

Wire rope tension gun for use with wire rope and Zip-Clip locking devices

PART NO	TO SUIT	CARTON
		QTY
ZIP-TENS	ALL SIZES	10

## DUCT HANGER



### Description

Zip-Clip duct hanger replaces standard KL100 locking device

Duct hanger is designed to be fastened to rectangular ductwork

PART NO	SWL	SUIT SYSTEM	CARTON
	kg		QTY
ZIP-DUCT	45	S	10

## CON-LOCK SPIKE




### Description

Individual loose con-lock spike

Hammer in anchor suspension system for concrete ceilings

No claw back required on installations

ETA Approved



PART NO	LENGTH	DRILL SIZE	DRILL DEPTH	CARTON
	mm			mm
ZIP-CL	54	6	35	50

## SEISMIC ROD STIFFENER



### Description

Suitable to fix FM1000 channel to vertical M10 & M12 threaded rod for seismic applications

Available in Zinc and HDG finish

PART NO	FINISH	CARTON
		QTY
FMSRS-M12	ZINC	50
FMSRS-M12HDG	HDG	50

## PVC SLEEVE




### Description

Rubber sleeve in various thicknesses to protect metal wire, prevent abrasion and dissimilar metal corrosion

PART NO	DIAMETER	LENGTH	CARTON
	mm	M	QTY
ZIP-PVC100S	3	100	1
ZIP-PVC100P	6	100	1

## CORNER PROTECTOR

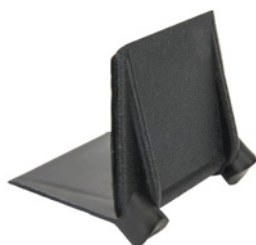


### Description

Plastic 90° corner protector to prevent contact of wire rope & sharp edge of ductwork

PART NO	CARTON
	QTY
ZIP-CPA	1



## SEISMIC BRACING KITS

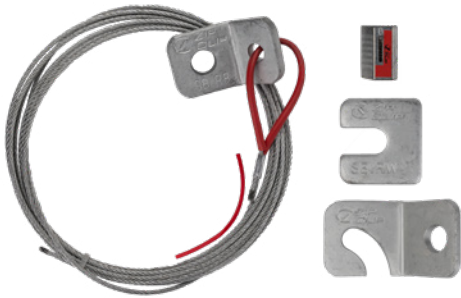

### Description

Seismic bracing kit  
Each kit comes complete with

- seismic anchor bracket
- a selected length of steel wire rope
- wire locking device
- retrofit bracket
- restraint washer and additional PVC sleeve

Load ratings determined by qualified seismic engineer  
Contact FLEXISTRUT for relevant technical data and suitability

PART NO	LENGTH	BRACKET SIZE	IDENTITY COLOUR	CARTON
	M			QTY
ZIPPLEK2R	2	M10	RED	1
ZIPPLEK3R	3	M10	RED	1
ZIPPLEK5R	5	M10	RED	1
ZIPPLEK2B	2	M10	BLUE	1
ZIPPLEK2B/M12	2	M12	BLUE	1
ZIPPLEK3B	3	M10	BLUE	1
ZIPPLEK3B/M12	3	M12	BLUE	1
ZIPPLEK5B	5	M10	BLUE	1
ZIPPLEK5B/M12	5	M12	BLUE	1
ZIPPLEK2GY	2	M12	GREEN-YELLOW	1
ZIPPLEK3GY	3	M12	GREEN-YELLOW	1
ZIPPLEK5GY	5	M12	GREEN-YELLOW	1

## RETROFIT ANGLE BRACKET



### Description

Suitable to retrofit to existing M10 & M12 threaded rods

To be used in conjunction with Zip Clip Seismic bracing wire

PART NO	SIZE	CARTON
		QTY
FMZ-RAB	M10 & M12	50

**SITE BOX**



**Description**

- Hydraulic arms for easy lid opening
- Blue powder coated finish
- Heavy duty fold away side handles
- Provision for fork lift handling
- Concealed hinges

PART NO	HEIGHT	LENGTH	DEPTH	WEIGHT	CARTON
	mm				mm
SITEBOX	888 (Closed lid)	1220	684	68	1
	1418 (Open lid)				

**SITE CABINET**



**Description**

- Heavy duty castors (2 x Lockable)
- 20 x Racking bins (12 x Large, 8 x Small)
- 2 x Grommets for cable access
- Recessed padlock area
- Adjustable shelving

PART NO	WIDTH	HEIGHT	DEPTH	WEIGHT	CARTON
	mm				mm
SITECABINET	1100 (Closed doors)	1610	600	160	1
	1965 (Open doors)				



## PIPE INSULATIONS



### Description

Closed cell cross-linked pipe insulation

Pre slit for fast installation

AS1530.3 0,0,0,1 compliant  
(Data sheets available on request)

PART NO	I.D	O.D	LENGTH	CARTON
	mm	mm	M	QTY
FC1325	13	63	2	60
FC1925	20	70	2	50
FC2525	25	76	2	40
FC3225	32	83	2	35
FC3825	38	89	2	30
FC5025	51	102	2	25
FC6425	64	115	2	20
FC7625	76	127	2	15
FC10225	102	152	2	10
FC1338	13	89	2	25
FC1938	20	95	2	20
FC2538	25	102	2	20
FC3238	32	108	2	20
FC3838	38	115	2	15
FC5038	51	127	2	15
FC6438	64	140	2	12
FC7638	76	152	2	10
FC10238	102	178	2	7

## CONSTRUCTION FOAMS



### Description

Closed cell cross linked Polyolefin foam

Comes non adhesive backed as standard

Other sizes available on request

PART NO	DESCRIPTION	WIDTH	LENGTH	CARTON
		mm	M	QTY
FOAM050	NON ADHESIVE FOAM	50	25	1
FOAM100	NON ADHESIVE FOAM	100	25	1

## GIRDER CLIPS




### Description

Suitable to connect Conduit and PVC pipes to steel beams

Zinc yellow finish

PART NO	SUIT SIZE	CARTON
	mm	QTY
GIRDER-1620	16 - 20	100
GIRDER-2532	25 - 32	100

## VERTICAL FLANGE CLIP

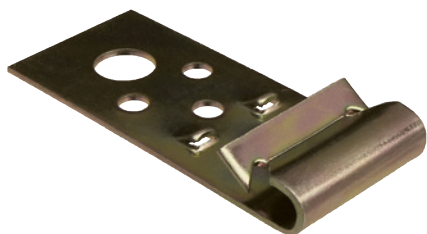

### Description

Suits 1.6 - 2.5mm steel purlins

Zinc yellow finish

PART NO	SUIT PURLIN THICKNESS	HOLE FIXING DIAMETERS	CARTON
	mm	mm	QTY
PLC4M	1.6 - 2.5	3 & 6	100



## ADJUSTABLE NOGGIN



### Description

Zinc plated steel noggin unloaded to suit screw of choice

Set back measurer

PART NO	ADJUSTABLE WIDTH	CARTON
	mm	QTY
FASTNOG	330 - 600	10

## ADJUSTABLE NOGGIN



### Description

Zinc plated steel noggin unloaded to suit screw of choice

PART NO	ADJUSTABLE WIDTH	CARTON
	mm	QTY
BARRNOG	330 - 600	10

## HOSE CLAMPS



### Description

Stainless steel hose clamp (Zinc plated screw)

Perforated band

Other sizes and finishes available on request.

PART NO	SIZE	FINISH		CARTON
	mm	BAND	SCREWS	QTY
HCSS-1325	13 - 25	301 S/S	ZINC PLATED	10
HCSS-2138	21 - 38	301 S/S	ZINC PLATED	10
HCSS-3357	33 - 57	301 S/S	ZINC PLATED	10
HCSS-5276	52 - 76	301 S/S	ZINC PLATED	10
HCSS-7195	71 - 95	301 S/S	ZINC PLATED	10
HCSS-90114	90 - 114	301 S/S	ZINC PLATED	10



## DEKTITES® METAL ROOF



### Description

High durability EPDM rubber roof flashing

Suit metal roofs

UV Rated

PART NO	SIZE RANGE	BASE	ROOF PITCH	COLOUR	CARTON
	mm	mm	DEGREE		QTY
FDT0-35	0 - 35	100 x 100	0 - 45	BLACK	20
FDT5-55	5 - 55	139 x 139	0 - 45	BLACK	15
FDT50-70	50 - 70	181 x 181	0 - 45	BLACK	15
FDT5-127	5 - 127	220 x 220	0 - 45	BLACK	15
FDT75-175	75 - 175	280 x 280	0 - 45	BLACK	10
FDT125-230	125 - 230	363 x 363	0 - 45	BLACK	10
FDT150-300	150 - 300	456 x 456	0 - 45	BLACK	10
FDT230-508	230 - 508	681 x 681	0 - 45	BLACK	5

## CLOUTS



### Description

General purpose galvanized clouts

PART NO	LENGTH	THICKNESS	CARTON
	mm	mm	QTY
CLOUT-25	25	2.80	2kg
CLOUT-30	30	2.80	2kg



## CABLE TIES



### Description

Heavy duty cable ties suitable for the electrical and HVAC industry

Available in Black, Nylon and Stainless Steel

To be used with CT-TENS cable tie tensioner

PART NO	COLOUR	LENGTH	WIDTH	CARTON
		mm	mm	QTY
CT-200x4.8	BLACK	200	4.8	100
CT-300x4.8	BLACK	300	4.8	100
CT-300x7.6	BLACK	300	7.6	100
CT-380x7.6	BLACK	380	7.6	100
CT-530x9.0	BLACK	530	9.0	100
CT-830x9.0	BLACK	830	9.0	100
CT-1220x9.0	NATURAL	1220	9.0	100
CT-1550x9.0	NATURAL	1550	9.0	100
CTSS-200x4.6	S/S	200	4.6	100
CTSS-360x4.6	S/S	360	4.6	100
CTSS-360x7.6	S/S	360	7.6	100
CTSS-520x7.6	S/S	520	7.6	100
CTSS-680x7.6	S/S	680	7.6	100
CTSS-840x7.6	S/S	840	7.6	100

## CABLE TIES TENSIONING TOOL



### Description

Heavy duty hand tool suitable to tension nylon cable ties

PART NO	CUTTING WIDTH	CARTON
	mm	QTY
CT-TENS	2.5 - 9.0	10

## STUD PUNCH AND GROMMETS



### Description

#### GROM

Protects pipe from sharp edges of steel material

Plastic tight fit grommet for range of size pipe and material

#### MSP

Metal stud punch for 34mm holes in up to 1.6mm steel material

PART NO	I.D	O.D	CARTON
	mm	mm	QTY
GROM	12 - 25	34	100
MSP		34	1

## DAMP COURSE




### Description

2 Ply bituminous flashing

Used for waterproofing and damp coursing

PART NO	PLY	WIDTH	LENGTH	CARTON
		mm	M	QTY
DAMPCOURSE	2	110	20	1

## WAFFLE PADS

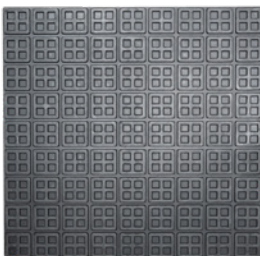

### Description

General purpose light duty anti-vibration mat

Large square profile for easy cuts

PART NO	SIZE	THICKNESS	CARTON
	mm	mm	QTY
WAFFLE	450 x 450	10	1
WAFFLE-SUPER	450 x 450	20	1



## BUILDERS STRAP



### Description

Multi-use steel strapping, used for bracing non structural materials

Pre-Perforated for ease of fixing locations

PART NO	WIDTH	THICKNESS	LENGTH	CARTON
	mm	mm	M	QTY
HOPIRON	25	0.6	30	1

## FOAM BLOCK



### Description

General purpose foam block

Larger block supplied, designed to be cut down to desired size

PART NO	DESCRIPTION	WIDTH	LENGTH	CARTON
		mm	mm	QTY
FOAMBLOCK	POLY FOAM BLOCK	300 x 400	1200	1

## PIZZA TRAY



### Description

Zinc plated cover plate for covering collar penetrations

PART NO	DIAMETER	CARTON
	mm	QTY
PT200	224	50

## BROOMS



### Description

General purpose indoor and outdoor brooms

PART NO	DESCRIPTION	WIDTH	CARTON
		mm	QTY
BROOM-HARD	HARD BRISTLE BROOM SUIT OUTDOOR	610	1
BROOM-SOFT	SOFT BRISTLE BROOM SUIT OUTDOOR	610	1
BROOM-IND	SOFT BRISTLE BROOM SUIT INDOOR	270	1
DUSTPAN	LIGHT DUTY HANDHELD DUSTPAN	-	1

## MEASURING TAPE



### Description

High quality, easy to read measuring tape

8 Metre standard length

Premium Rubber Grip

Double sided blade printing

PART NO	SIZE	CARTON
	M	QTY
TAPE-8M	8	1

## UTILITY KNIFE



### Description

Self loading utility knives, can house up to 10 blades

Quick change of blade by a press of a button

PART NO	DESCRIPTION	CARTON
		QTY
KNIFE	FAST AUTO RELOAD KNIFE	1
KNIFE-B10	KNIFE BLADE 10 PACK	1 (10 IN BUCKET)
KNIFE-B100	KNIFE BLADE 100 PACK	1 (100 IN BUCKET)



## CUTTING COMPOUNDS



### Description

Suitable to use on Stainless Steel, Aluminium, Copper, Brass and Steel

Prolongs abrasive tool life cycle

Maintains efficient lubrication throughout use

PART NO	SIZE	SIZE	MATERIAL	CARTON
	g	ml		QTY
TREF	500	-	PASTE	1
TREF-HD	-	500	LIQUID	1

## SOLDER PASTE



### Description

General purpose flux suitable for most engineering materials

PART NO	SIZE	CARTON
	g	QTY
SLDP	250	1

## ROLL GROOVE LUBRICANT



### Description

General purpose roll groove lubricant

PART NO	CARTON
	QTY
GREASE	1

## DEGREASING SPRAYS



### Description

Multi purpose lubricant and degreaser

Loosens rust to metal bonds and frees stuck, frozen or rusted metal parts

PART NO	SIZE	CARTON
	g	QTY
SP-WD	425	12

## LIQUIDS



### Description

General purpose solvents for cleaning

Data sheets available on request for suitability

PART NO	DESCRIPTION	SIZE	CARTON
		L	QTY
METHO	METHYLATED SPIRITS	1	1
THINNER	PAINT THINNERS	1	1
TURPS	MINERAL TURPENTINE	1	1

## PAINT BRUSHES



### Description

General purpose timber handle paint brush

PART NO	DESCRIPTION	WIDTH	CARTON
		mm	QTY
PBP-25	GENERAL PURPOSE	25	1
PBP-50	GENERAL PURPOSE	50	1
PBP-75	GENERAL PURPOSE	75	1
PBP-100	GENERAL PURPOSE	100	1